

03/14/00

3580 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 35 C14351

First Named Inventor or Application Identifier

HIROYOSHI YOSHIDA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 833. ☒ Drawing(s) (35 USC 113) Total Sheets 724. ☒ Oath or Declaration Total Pages 1a. ☒ Newly executed (original or copy)b. ☐ Unexecuted for information purposesc. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]i. ☐ DELETION OF INVENTOR(S)Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)10. ☐ English Translation Document (if applicable)11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations12. ☐ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)14. ☐ Small Entity ☐ Statement filed in prior application
Status still proper and desired15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label05514
(Insert Customer Number or Attach bar code label here)or ☐ Correspondence address below

NAME

Address

City

Country

State

Telephone

Zip Code

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	13-20 =	0	X \$ 18.00 =	\$ 0.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	6-3 =	3	X \$ 78.00 =	\$234.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$690.00
				Total of above Calculations =	\$924.00
				Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).	
				TOTAL =	\$924.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 924.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED


NAME	Leonard P. Diana (Reg. No. 29,296)
SIGNATURE	
DATE	March 13, 2000

IMAGE DATA TRANSFER METHOD

BACKGROUND OF THE INVENTION

Field of the Invention

5 The invention relates to an image data transfer method for transferring image data indicative of an image to a desired destination.

Related Background Art

10 In recent years, various image data such as image data obtained by reading an image on an original, image data obtained by photographing an object by a digital camera or the like, image data formed by an image editing application, and the like is transferred through a network such as Internet or the like.

15 However, the conventional method has the following problems.

 That is, when a large quantity of original is transferred, since it is sent irrespective of a network situation on the destination side, there is a possibility such that a trouble occurs in the network of the destination (sending destination).

20

 When a processing ability (for example, whether a color image can be handled or not, or the like) of the destination is inferior to an image to be sent, the image is edited in accordance with the processing ability of the destination or the transmission has to be stopped.

25

SUMMARY OF THE INVENTION

It is an object of the invention to provide an image transfer method which can solve the foregoing problems.

5 Another object of the invention is to provide an image transfer method which can transfer image data by a proper method suitable for image data to be transferred.

10 Still another object of the invention is to provide an image transfer method which can transfer image data by a proper method in accordance with a destination.

15 The above and other objects and features of the present invention will become apparent from the following detailed description and the appended claims with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

20 These and other objects and features of the invention will become more apparent from the following detailed description of the embodiments with reference to the accompanying drawings in which:

25 Fig. 1 is a schematic diagram illustrating a network system including various devices and apparatus connected to each other according to an embodiment of the invention;

Fig. 2 is a block diagram generally illustrating

an image processing apparatus;

Fig. 3 is a schematic diagram illustrating an external appearance of a scanner unit and that of a printer unit;

5 Fig. 4 is a schematic diagram illustrating a control panel;

Fig. 5 is a block diagram illustrating a scanner image processor;

10 Fig. 6 is a block diagram illustrating a printer image processor;

Fig. 7 is a block diagram illustrating an image compression unit;

Fig. 8 is a block diagram illustrating an image rotation unit;

15 Fig. 9 is a schematic representation of addressing performed by the image rotation unit to rotate image data;

Fig. 10 is a schematic representation of the process of writing data performed by the image rotation unit during the image rotation process;

Fig. 11 is a block diagram illustrating a device I/F;

Fig. 12 is a block diagram generally illustrating the software used in the image processing apparatus;

25 Fig. 13 is a block diagram illustrating applications associated with the processes according to the embodiment of the invention;

Fig. 14 is a schematic diagram illustrating a control screen displayed on an LCD display device of the control panel;

Fig. 15 is a schematic diagram illustrating an ID input screen for inputting ID data;

Fig. 16 is a schematic diagram illustrating an error screen which is displayed when an error occurs;

Fig. 17 is a schematic diagram illustrating a COPY main screen which is displayed in a COPY mode;

Fig. 18 is a schematic diagram illustrating a screen where a list of printers is displayed;

Fig. 19 is a schematic diagram illustrating a screen where a list of image qualities is displayed;

Fig. 20 is a schematic diagram illustrating a subscreen for setting a scaling factor;

Fig. 21 is a schematic diagram illustrating a subscreen for selecting paper;

Fig. 22 is a schematic diagram illustrating a subscreen for setting a sorter;

Fig. 23 is a schematic diagram illustrating a subscreen for setting a two-sided copying operation;

Fig. 24 is a schematic diagram illustrating a SEND main screen which is displayed in a SEND mode;

Fig. 25 is a schematic diagram illustrating the initial state of the SEND main screen which is displayed in the initial state in the SEND mode;

Fig. 26 is a schematic diagram illustrating a full

keyboard displayed on the screen for inputting
information;

Fig. 27 is a schematic diagram illustrating an
address book screen for displaying and selecting
5 addresses;

Fig. 28 is a schematic diagram illustrating
detailed information about an address displayed on the
screen;

Fig. 29 is a schematic diagram illustrating a
10 display screen for retrieving an address;

Fig. 30 is a schematic diagram illustrating a
screen on which a list of classes of addresses to be
retrieved is displayed;

Fig. 31 is a schematic diagram illustrating a
15 screen on which a list of attributes to be retrieved is
displayed;

Fig. 32 is a schematic diagram illustrating a
screen on which a list of retrieval conditions is
displayed;

Fig. 33 is a schematic diagram illustrating a
20 screen on which a list of address books to be searched
is displayed;

Fig. 34 is a schematic diagram illustrating an
example of a screen on which retrieved addresses are
25 displayed;

Fig. 35 is a schematic diagram illustrating a
screen for inputting a new destination in the SEND

mode;

Fig. 36 is a schematic diagram illustrating a ten key keyboard displayed on the screen, for inputting a telephone number or the like;

5 Fig. 37 is a schematic diagram illustrating a screen for inputting detailed information of a destination in the person class;

Fig. 38 is a schematic diagram illustrating a screen for inputting detailed information of a
10 destination in the database class;

Fig. 39 is a schematic diagram illustrating a screen for inputting detailed information of a destination in the group class;

Fig. 40 is a schematic diagram illustrating a
15 screen for setting a hard disk;

Fig. 41 is a schematic diagram illustrating a screen for setting printing conditions;

Fig. 42 is a schematic diagram illustrating a screen on which a list of paper sizes is displayed;

20 Fig. 43 is a schematic diagram illustrating a screen on which a list of sorters is displayed;

Fig. 44 is a schematic diagram illustrating a screen for setting scanning parameters;

25 Fig. 45 is a schematic diagram illustrating a screen on which a list of paper sizes is displayed in the form of a pull-down menu on the scanning parameter setting screen;

Fig. 46 is a schematic diagram illustrating a screen on which a list of resolutions is displayed in the form of a pull-down menu on the scanning parameter setting screen;

5 Fig. 47 is a schematic diagram illustrating a screen on which a list of scanning modes is displayed in the form of a pull-down menu on the scanning parameter setting screen;

10 Fig. 48 is a schematic diagram illustrating a RETRIEVE main screen (WWW subscreen) which is displayed in a RETRIEVE mode;

Fig. 49 is a schematic diagram illustrating a screen on which a list of bookmarks is displayed;

15 Fig. 50 is a schematic diagram illustrating an E-mail subscreen;

Fig. 51 is a schematic diagram illustrating a facsimile subscreen;

Fig. 52 is a schematic diagram illustrating a FTP server subscreen;

20 Fig. 53 is a schematic diagram illustrating a screen for setting printing conditions in the RETRIEVE mode;

Fig. 54 is a schematic diagram illustrating a TASKS main screen which is displayed in a TASKS mode;

25 Fig. 55 is a schematic diagram illustrating a screen for setting detailed conditions of a WWW task;

Fig. 56 is a schematic diagram illustrating a

check time subscreen for setting the time at which a specified task is executed;

Fig. 57 is a schematic diagram illustrating a check time subscreen for setting the day of week and
5 the time when a specified task is executed;

Fig. 58 is a schematic diagram illustrating a check time subscreen for setting the day of every month when a specified task is executed;

Fig. 59 is a schematic diagram illustrating a
10 management subscreen which is displayed in a MGMT mode;

Fig. 60 is a schematic diagram illustrating a configuration subscreen which is displayed in a CONFIG mode;

Fig. 61 is a schematic diagram illustrating a
15 document information service (data processing among the job manager, print manger, and scan manager);

Fig. 62 is a schematic diagram illustrating the process associated with a database and a counter in the document information service;

Fig. 63 is a block diagram illustrating hardware involved in the scanning operation of the scanner;

Fig. 64 is a block diagram illustrating software involved in the scanning operation of the scanner;

Fig. 65 is a schematic diagram illustrating a
25 parameter table used in the scanning operation;

Fig. 66 is a block diagram illustrating hardware involved in the printing operation of the printer;

Fig. 67 is a timing chart illustrating the operation of transferring print image data;

Fig. 68 is a schematic diagram illustrating a print parameter register of an engine I/F board;

5 Fig. 69 is a schematic diagram illustrating communication commands (setting command, control command, status command) used in communication between the printer and the engine I/F board;

10 Fig.70 is a flow chart for representing a substance of a procedure by a transmitting condition discriminating program.

Fig.71 is a schematic diagram illustrating contents in the table of a permissible data amount of an information route.

15 Fig.72 is a schematic diagram illustrating contents in the table of a destination information.

Fig.73 is a schematic diagram illustrating one example of a transmitting message.

20 Fig.74 is a schematic diagram illustrating another example of a transmitting message.

Fig.75 is a schematic diagram illustrating still another example of a transmitting message.

DESCRIPTION OF THE PREFERRED EMBODIMENT

25 The present invention is described in further detail below with reference to a preferred embodiment in conjunction with the accompanying drawings.

Fig. 1 is a schematic diagram generally illustrating a network system including various devices and apparatus connected to each other according to an embodiment of the invention.

5 In Fig. 1, reference numeral 1001 denotes an image processing apparatus according to the present embodiment. This image processing apparatus includes a scanner, a printer, and other devices, which will be described later. Document image data obtained via the
10 scanner can be output over a local area network (LAN). Conversely, image data received via the LAN can be printed on a copying sheet using the printer. Furthermore, a document image input via the scanner can be transmitted over a public network such as PSTN
15 (Public Switched Telephone Network) or ISDN (Integrated Services Digital Network) using a facsimile transmission module and an image received via the public network such as PSTN or ISDN can be printed using the printer.

20 In the system shown Fig. 1, a database server 1002 stores and manages two-level or multilevel image data input via the image processing apparatus 1001. A database client 1003 can retrieve and read the image data stored in the database server 1002.

25 An E-mail server 1004 can receive an image input to the image processing apparatus 1001 as attached file to an E-mail.

An E-mail client 1005 is a computer terminal having an E-mail capability for receiving and transmitting E-mail via the E-mail server 1004.

5 A WWW server 1006 provides HTML documents over the LAN. The image processing apparatus 1001 can print HTML documents provided by the WWW server.

The LAN 1010 is connected to Internet/intranet 1012 via a router 1011. Devices 1020, 1021, 1022, and 1023 similar to the above-described database server 1002, the WWW server 1006, the E-mail server 1004, and the image processing apparatus 1001, respectively, are also connected to the Internet/intranet 1012.

The image processing apparatus 1001 can communicate with a facsimile machine 1031 via a PSTN/ISDN 1030. Furthermore, a printer 1040 is connected to the LAN so that an image input to the image processing apparatus 1001 can be printed by the printer 1040.

The construction and operation of the image processing apparatus 1001 is described in detail below in terms of hardware and also software.

1. Hardware

1.1 General Construction

25 Fig. 2 is a block diagram illustrating the general construction of the image processing apparatus 1001.

A controller unit 2000 is connected to devices

such as a scanner 2070 serving as an image input device
(for scanning the image of a document) and a printer
2095 serving as an image output device (for outputting
an image in a visible form) and also connected to a LAN
5 2011 (LAN 1010) and a public network (WAN) 2051
(PSTN/ISDN 1030) so as to control the input/output
operation of image information and device information.

A CPU 2001 serves as a controller for controlling
the operation over the entire image processing
10 apparatus shown in Fig. 2. A RAM 2002 serves as a
system work memory used by the CPU 2001 and also as an
image memory for temporarily storing image data. A ROM
2003 is a boot ROM storing a boot program used by the
image processing apparatus. A HDD 2004 is a hard disk
15 drive for storing a system software program and image
data.

A control panel I/F 2006 serves as an interface
for a control panel 2012, for outputting image data to
the control panel 2012. The control panel I/F 2006
20 also serves to transfer information input by a user via
the control panel 2012 to the CPU 2001.

A network I/F 2010 serves to connect the image
processing apparatus to the LAN 2011 including a
plurality of terminals so as to make it possible to
25 input and output information via the LAN 2011. A modem
2050 serves to connect the image processing apparatus
to a public network 2051 so as to make it possible to

input and output information via the public network 2051 by a facsimile communication or a data communication.

5 The devices described above are connected to a system bus 2007.

The system bus 2007 is connected to an image bus 2008 via an image bus I/F 2005 serving as a bus bridge for converting the data structure. The image bus 2008 may be realized using a PCI bus or an IEEE1394 bus.

10 The following devices are located on the image bus 2008.

That is, one device is a raster image processor (RIP) 2060 for converting a PDL (Page Description Language) code for a page printer to a bit map image.
15 Another device is a device I/F 2020 for connecting the scanner 2070 and the printer 2095, serving as image input/output devices, to the controller 2000 whereby image data can be transferred in a synchronous or asynchronous fashion between the image input/output
20 devices and the controller 2000. Furthermore, a scanner image processor 2080 performs correction, edition, and other processing on the input image data, and a printer image processor 2090 performs correction, resolution conversion, and other processing on the
25 image data to be output, depending on the characteristics of the printer. An image rotation unit 2030 is used to rotate image data and an image

compression/decompression unit 2040 performs
compression/decompression on image data according to
the JPEG standard from multi-level image data and
according to the JBIG, MMR, or MH technique for
5 two-level image data.

1.2 Image Input/Output Device

Fig. 3 is an external view of an image
input/output device, wherein similar reference numerals
10 denote similar parts to those described above. In any
other figures, similar reference numerals are used to
denote similar parts.

A scanner 2070 serving as an image input device
scans a document illuminated with light and senses the
15 image thereof using a CCD line sensor (not shown)
thereby generating raster image data in the form of an
electric signal corresponding to the original image of
the document. Documents are placed on a tray 2073 of a
document feeder 2072. If a user issues a scan start
20 command via a control panel 2012, a controller CPU 2001
sends a command to the scanner 2070 to feed one
document at a time from the feeder and scan the image
of the fed document.

A printer 2095 serving as an image output device
25 converts the raster image data 2096 input by various
sources in the form of an electric signal to a
corresponding visible image on a sheet of paper. The

printer 2095 may be realized in any form such as an electrophotographic printer with a photosensitive drum or belt, or an ink-jet printer in which ink is emitted from a small-nozzle array thereby directly forming an image on a sheet of paper. A printing operation is started if a command 2096 is issued by the controller CPU 2001. The printer 2095 includes a stack of paper feeders in which paper cassettes 2101, 2102, 2103, and 2104 are placed so that paper with a desired size and/or direction can be fed from a selected paper cassette. Printed paper is fed onto an output tray 2111.

1.3 Control Panel

Fig. 4 illustrates the outline of the construction of the control panel 2012.

An LCD display 2013 has a touch panel sheet attached to an LCD screen. The LCD display 2013 displays a control screen on which a user can issue an operation command to the image processing apparatus. If a key displayed on the screen is pressed, the positional information of the key is sent to the controller CPU 2001. On the basis of this positional information, the CPU 2001 can determine what command is issued by the user. The CPU 2001 changes the contents displayed on the LCD display 2013 as required.

A start key 2014 is used to start the operation of

scanning the image of a document. A two-color (green and red) LED 2018 is disposed in the center of the start key 2014 so that a user can determine whether the start key 2014 is in an enabled or disabled state
5 judging from the color of the LED 2018. A stop key 2015 is used to stop the operation of the image processing apparatus during processing. An identification key 2016 is used to input a user identification. A reset key 2017 is used to reset the
10 setting made via the control panel 2012 to an initial state. The above-described keys 2014-2017 are hard keys.

1.4 Scanner Image Processor

15 Fig. 5 is a block diagram illustrating the construction of the scanner image processor 2080.

An image bus I/F controller 2081 is connected to the image bus 2008 so that it serves to control the bus access sequence and also control the operation,
20 including the timing control, of various devices of the scanner image processor 2080.

A filtering processing unit 2082 is a spatial filter for performing a convolution operation on image data. An editor 2083 performs an editing operation on
25 input image data. For example, the editor 2083 detects, from the input image data, an area enclosed in a closed line marked on the document with a marker pen,

and then performs various processes, such as shading, crosshatching, and negative-positive inverting on the image data within the closed area. When the resolution of the image data is changed, a scaling unit 2084
5 scales the image data up or down by performing interpolation on the raster image in the main scanning direction. Scaling in the subscanning direction is performed by changing the scanning speed of an image line sensor (not shown). A table 2085 is a conversion
10 table which is referred to when image data representing luminance obtained by scanning is converted to data representing intensity. A binarization unit 2086 converts input multilevel gray-scale image data to two-level data by means of screening or error diffusion
15 processing.

After completion of the above-described process, the image data is transmitted over the image bus 2008 via the image bus controller 2081.

20 1.5 Printer Image Processor

Fig. 6 is a block diagram illustrating the construction of the printer image processor 2090.

An image bus I/F controller 2091 is connected to the image bus 2008 so that it serves to control the bus
25 access sequence and also control the operation, including the timing control, of various devices of the scanner image processor 2090. A resolution converter

2092 converts the resolution of image data received via the network I/F 2011 or the public line 2051 so that it matches resolution required by the printer 2095. A smoothing unit 2093 smooths out jaggies (appearing at a white/black boundary such as an oblique line) of image data converted in resolution.

1.6 Image Compression Unit

Fig. 7 is a block diagram illustrating the construction of the image compression unit 2040.

An image bus I/F controller 2041 is connected to the image bus 2008 so that it serves to control the operation in terms of the bus access sequence, the timing of data transmission to/from an input buffer 2042 and an output buffer 2045, and the setting of the operation mode of an image compression unit 2043. The process performed in the image compression unit 2043 is described below.

The CPU 2001 sets the image bus I/F controller 2041 via the image bus 2008 in terms of the conditions of the image compression. In accordance with the setting made by the CPU 2001, the image bus I/F controller 2041 sets the image compression unit 2043 in terms of the conditions of the image compression (such as MMR compression, JBIG decompression, etc.). After completion of the above-described settings, the CPU 2001 enables the image bus I/F controller 2041 to

transfer image data. If the image bus I/F controller 2041 is enabled to transfer image data, it starts to transfer image data from the RAM 2002 or another device connected to the image bus 2008. The received image data is temporarily stored in the input buffer 2042.

In response to an image data request, the image data is transferred at a fixed speed from the input buffer 2042 to the image compression unit 2043. In this transfer operation, the input buffer 2042 determines whether it is allowed to transfer image data between the image bus I/F controller 2041 and the image compression unit 2043. If it is not allowed to read image data from the image bus 2008 and write it into the image compression unit 2043, the input buffer 2042 does not transfer image data (this method of transferring data is referred to as handshaking). The image compression unit 2043 temporarily stores the received image data in a RAM 2044. If the amount of image data stored in the RAM 2044 becomes sufficient to perform image compression (the required amount of image data is a few line data, although it depends on the image compression technique), the image compression unit 2043 performs image compression using the image data stored in the RAM 2044. The compressed image data is immediately transmitted to the output buffer 2045. The output buffer 2045 transfers the image data to the image bus I/F controller 2041 while handshaking with the image

bus I/F controller 2041 and also with the image
compression unit 2043. The image bus I/F controller
2041 transfers the received image data in the
compressed (or decompressed) form to the RAM 2002 or
5 another device connected to the image bus 2008. The
sequence of operations described above is performed
repeatedly until there is no more processing request
issued from the CPU 2001 (after having processed a
required number of pages) or a stop request is issued
10 from the image compression unit (because an error
occurs in the compression/decompression process or for
another reason).

1.7 Image Rotation Unit

15 Fig. 8 is a block diagram illustrating the
construction of the image rotation unit 2030.

An image bus I/F controller 2031 is connected to
the image bus 2008 so that it serves to control the
operation in terms of the bus access sequence, the
20 setting of the operation mode of the image rotation
unit 2032, and the timing of data transmission to/from
the image rotation unit 2032. The process performed in
the image rotation unit is described below.

The CPU 2001 sets the image bus I/F controller
25 2031 via the image bus 2008 in terms of the conditions
of the image rotation. In accordance with the setting
made by the CPU 2001, the image bus I/F controller 2031

sets the image rotation unit 2032 in terms of the conditions of the image rotation (such as an image size, rotation direction, rotation angle). After completion of the above-described settings, the CPU

5 2001 enables the image bus I/F controller 2031 to transfer image data. If the image bus I/F controller 2031 is enabled to transfer image data, it starts to transfer image data from the RAM 2002 or another device connected to the image bus 2008. Herein it is assumed

10 that data has a size of 32 bits and the image has a size of 32×32 bits and also that the image data is transmitted via the image bus 2008 in units of 32 bits (each pixel can have either one of two levels).

To obtain an image with a size of 32×32 bits, it

15 is required to transfer a unit of data 32 times wherein the image data is transferred from discontinuous addresses (refer to Fig. 9).

The image data transferred by means of discontinuous addressing is written into the RAM 2033

20 so that the image data having a desired rotation can be obtained when the image data is read from the RAM 2033. For example, when it is desired to obtain an image rotated by 90° in a counterclockwise direction, the original 32-bit image data is written in the Y

25 direction as shown in Fig. 10. If this image data is read along the X direction, the resultant image is rotated relative to the original image.

After completion of the rotation process (writing into the RAM 2033) for the image with the size of 32 × 32 bits, the image rotation unit 2032 reads the image data from the RAM 2033 in the above-described manner and transmits the obtained data to the image bus I/F controller 2031.

The image bus I/F controller 2031 transfers the received image data in the rotated form, by means of continuous addressing, to the RAM 2002 or another device connected to the image bus 2008.

The sequence of operations described above is repeatedly performed until no more processing requests are issued from the CPU 2001 (because a required number of pages have been processed).

1.8 Device I/F

Fig. 11 illustrates the construction of the device I/F 2020.

An image bus I/F controller 2021 is connected to the image bus 2008 so that it serves to control the bus access sequence and also control the operation, including timing control, of various devices of the device I/F 2020. The image bus I/F controller 2021 also generates a control signal to the external scanner 2070 and the external printer 2095. A scan buffer 2022 temporarily stores image data received from the scanner 2070 and outputs the image data in synchronization with

the image bus 2008. A serial-parallel/parallel-serial converter 2023 combines or breaks down the image data stored in the scan buffer 2022 so as to convert the image data into a form having a data width which matches the image bus 2008. A

parallel-serial/serial-parallel converter 2024 breaks down or combines the image data received from the image bus 2008 so as to convert the image data into a form having a data width which matches the print buffer 2025. The print buffer 2025 temporarily stores the image data received from the image bus 2008 and outputs it in synchronization with the printer 2095.

The procedure of scanning an image is now described below.

The image data transmitted from the scanner 2070 is stored in the scan buffer 2022 in synchronization with the timing signal transmitted from the scanner 2070. In the case where a PCI bus is employed as the image bus 2008, when the amount of the image data stored in the buffer becomes 32 bits or more, 32-bit image data is transferred in a first-in first-out fashion from the buffer to the serial-parallel/parallel-serial converter 2023, which in turn converts the received data into 32-bit image data and transmits the resultant image data over the image bus 2008 via the image bus I/F controller 2021. On the other hand, when an IEEE1394 bus is employed as

the image bus 2008, the image data stored in the buffer is transferred in a first-in first-out fashion to the serial-parallel/parallel-serial converter 2023, which in turns converts the received data to serial image data and transmits the resultant data over the image bus 2008 via the image bus I/F controller 2021.

The image printing operation is described below.

In the case where the image bus 2008 is realized by a PCI bus, the image bus I/F controller transfers 32-bit image data received via the image bus to the parallel-serial/serial-parallel converter 2024, which in turn breaks down the image data into bits matching the input data of the printer 2095. The resultant data is stored in the print buffer 2025. On the other hand, when the image bus 2008 is realized by an IEEE1394 bus, the image bus I/F controller transfers serial image data received via the image bus to the parallel-serial/serial-parallel converter 2024, which in turn converts the image data in such a manner as to have bits matching the input data of the printer 2095. The resultant data is stored in the print buffer 2025. The image data stored in the buffer is transferred in a first-in first-out fashion to the printer 2095 in synchronization with the timing signal transmitted from the printer 2095.

2. Software

2.1 General Construction of Software Blocks

Fig. 12 is a software block diagram of the image processing apparatus 1001.

A user interface (UI) 1501 serves as a module for
5 interfacing with various devices in the image
processing apparatus when a user performs various
operations or settings. In response to an operation
performed by the user, this module transmits input
information to various modules which will be described
10 later so as to issue a processing request or a data
setting command.

In Fig. 12, reference numeral 1502 denotes an
address book which is a database module for managing
the destination of data. In accordance with the
15 operation information given by the UI 1501, data is
added, deleted, and/or acquired to/from the address
book 1502 thereby giving information about the data
destination specified by the user to various modules
which will be described later. The address book stores
20 data representing the data formats, the types of images
allowed to be transmitted, and the resolutions, in
relation to the respective destinations.

In response to a request from a web client, a web
server module 1503 transmits management information
25 associated with the image processing apparatus to the
web client. The management information is read via a
control API 1518, which will be described later, and is

transmitted to the web client via an HTTP module 1512, a TCP/IP module 1516, and a network driver 1517, which will be described later.

A universal sending module 1504 serves to send
5 various data. That is, the universal sending module 1504 sends data specified by the user via the UI 1501 to a destination specified by the user. In the case where the user issues a command requesting that data to be sent should be generated by the scanner function of
10 the image processing apparatus, the data is generated by operating devices via the control API 1518 which will be described later.

A printer module 1505 is executed when the
universal sending module 1504 designates the printer as
15 the destination of image data.

An E-mail module 1506 is executed when the
universal sending module 1504 designates an E-mail
address as the destination of image data.

A database module 1507 is executed when the
20 universal sending module 1504 designates the database as the destination of image data.

A DP module 1508 is executed when the universal
sending module 1504 designates an apparatus similar to
the present image processing apparatus as the
25 destination of image data.

A remote copy scan module 1509 is executed when
image data is generated by the scanner function of the

present image processing apparatus and the resultant image data is transmitted to another apparatus connected via a network or the like thereby performing a process similar to a copy process which can be performed by the present image processing apparatus itself.

A remote copy print module 1509 is executed when image data is input to the image processing apparatus from another apparatus connected via a network or the like and the image data is output using the printer function of the present image processing apparatus thereby performing a process similar to a copy process which can be performed by the present image processing apparatus itself.

A web pull print module 1511 reads home page information via the Internet or an intranet and prints the obtained information.

An HTTP module 1512 is used when communication is performed in accordance to the HTTP. This module allows the web server 1503 and the web pull print module 1511 to perform communication via a TCP/IP module 1516 which will be described later.

An Ipr module 1513 allows the printer module 1505 in the universal sending module 1504 to perform communication according to the Ipr via the TCP/IP 1516 which will be described later.

An SMTP module 1514 allows the E-mail module 1505

in the universal sending module 1504 to perform communication according to the SMTP via the TCP/IP 1516 which will be described later.

A salutation manager module 1515 allows the
5 database module 1517, the DP module 1518, the remote copy scan module 1509, and the remote copy print module 1510, in the universal sending module 1504, to perform communication according to the salutation architecture.

A TCP/IP communication module 1516 allows various
10 modules described above to perform network communication in accordance with the TCP/IP via a network driver 1517 which will be described later.

The network driver 1517 controls physical devices connected to the network.

15 The control API 1518 provides an interface between an upstream module, such as an universal sending module 1504, and a downstream module such as a job manager 1519 which will be described later. The control API 1518 allows a reduction in the degree of dependence
20 between upstream and downstream modules thereby allowing the modules to be used in a more general manner.

The job manager 1519 interprets a processing command given by various modules described above via
25 the control API 1518, and transmits a command to various modules which will be described later. This job manager manages various processes performed by

hardware of the image processing apparatus, in a centralized fashion.

A CODEC manager 1520 controls and manages the data compression/decompression process, of various processes requested by the job manager 1519.

An FBE encoder 1521 compresses data input via the scanning process performed by the job manager 1519 and the scan manager 1524 into the FBE format.

A JPEG CODEC 1522 performs JPEG compression on input data or performs JPEG mapping on data to be printed, during the reading and scanning process performed by the job manager 1519 and the scan manager 1524 and during the printing process performed by the print manager 1526.

An MMR CODEC 1523 performs MMR compression on input data or performs MMR decompression on data to be printed, during the reading and scanning process performed by the job manager 1519 and the scan manager 1524 and during the printing process performed by the print manager 1526.

The scan manager 1524 manages and controls the reading and scanning process commanded by the job manager 1519.

A SCSI driver 1525 performs communication between the scan manager 1524 and a scanner unit provided in the image processing apparatus.

The print manager 1526 manages and controls the

printing process commanded by the job manager 1519.

An engine I/F driver 1527 provides an interface between the print manager 1526 and the printer.

A parallel port driver 1528 provides an interface
5 between the web pull print module 1511 and an external output device (not shown in Fig. 12) when the web pull print module 1511 outputs data to the output device via a parallel port.

Of various modules described above, only
10 particular modules required to drive desired devices may be set and used.

2.2 Applications

A built-in applications according to the present
15 embodiment are described below with reference to some figures.

Fig. 13 is a block diagram illustrating built-in applications used in the processes according to the present embodiment. In Fig. 13, a large block on the
20 left side of the figure includes applications in which the image processing apparatus 1001 mainly serves as a sending device (master device or active device), and a large block on the right side of the figure includes applications in which the image processing apparatus
25 1001 mainly serves as a receiving device (slave device or passive device). In this figure, similar reference numerals, device names, and other terms are used in a

similar fashion to those used in the previous figures. Of various applications described below, only some applications required for desired devices may be set and used.

5 A block 4050 is a user interface application block in which a process associated with the address book 4051 is also performed.

10 A block 4100 is involved in the process performed by a sending device (reading device) in a remote copy application.

 A block 4150 is involved in the broadcast process performed by the sending device.

 A block 4200 is involved in the process performed by the web pull print module.

15 A block 4250 is involved in the process performed by the web server module.

 A block 4300 is involved in the process performed by a receiving device (printer device) in the remote copy process.

20 A block 4350 is involved in the process of receiving and printing image data transmitted by means of broadcasting, using a general-purpose printer.

 A block 4400 is involved in the remote print process performed by a receiving device (printer
25 device).

 A block 4450 is involved in the process performed by a notes server, which is known in the art, to

receive and store image data transmitted by means of broadcasting.

A block 4500 is involved in the process performed by the database module to receive and store image data
5 transmitted by means of broadcasting.

A block 4550 is involved in the process performed by a mail server module, which is known in the art, to receive and store image data transmitted by means of broadcasting.

10 A block 4600 is involved in the process performed by a database module to receive and store image data (multilevel image data)transmitted by means of broadcasting.

15 A block 4650 is a web server module containing information contents and having functions known in the art.

A block 4700 is a web browser module having various functions, which are known in the art, required to access the web server.

20 Various applications are described in further detail below with reference to the associated blocks.

2.2.1 User Interface Applications

25 The functions of the user interface block 4050 have already been described in detail earlier. The address book 4051 functions as follows. The address book is stored in a nonvolatile storage device (a hard

disk or a nonvolatile memory with battery backup). The address book includes data representing the features and characteristics of devices connected to the network. Specific examples are shown below.

- 5 * Formal names of devices and their aliases
- * Network addresses of devices
- * Network protocols that devices can accept
- * Document formats that devices can accept
- * Compression types that devices can accept
- 10 * Image resolution that devices can accept
- * Paper sizes and information about paper feeders,
if a device is a printer
- * Names of folders in which a document can be
stored, if a device is a server (computer)

15 In the applications described below, the features and characteristics of devices can determine the feature and characteristics of destinations on the basis of the information described in the address book 4051.

20 The user can edit the address book. An address book may also be downloaded from a server computer on the network. Furthermore, an address book stored in a server computer on the network may be directly referred to.

25

2.2.2 Remote Copy Application

The remote copy application determines the

resolution that the device designated as the destination on the basis of the information described in the address book 4051 and compresses the image data (two-level image data) obtained via the scanner using the MMR compression technique known in the art depending on the resolution. The image data is then converted into the TIFF (tagged image file format) form and transmitted via the SLM 4103 to the printer connected to the network (4100). Although not described in detail here, the SLM 4103 is one of network protocols, known as a salutation manager (or smart link manager) containing device control information.

2.2.3 Broadcast Application

Unlike the remote copy application, the broadcast application can transmit document image data obtained via one scanning operation to a plurality of destinations (4150). The destinations are not limited to printer devices but server computers can also be destinations to which data is directly transmitted.

That is, the image processing apparatus can distribute the image data input by the scanner 2070 etc. to a plurality of devices via the network 2010 and the modem 2050.

The operation is described below for the respective destinations.

In the case where it is determined from the data described in the address book 4051 that a destination device is capable of communicate using the network printer protocol LPD (Line Printer Daemon) and also
5 capable of accepting printer control commands described in the LIPS, an image is read in accordance with the image resolution determined also from the address book 4051 and the obtained image data is compressed according to the FBE (First Binary Encoding) technique
10 in this specific embodiment. The compressed image data is then coded according to the LIPS and the resultant data is transmitted to the destination device using the LPR which is one of known network printer protocol (4350).

15 In the case where a destination device is a server capable of communicating via the SLM, the address of the server and the designated folder in the server are detected from the address book 4051, and image data (two-level image data) obtained via a scanner is
20 compressed according to the MMR technique and converted into the TIFF (Tagged Image File Format) form, as in the remote copy application. The resultant image data is stored in a particular folder of the server connected to the network (4500).

25 When image data is transferred from the present image processing apparatus 1001 to a server which is determined, from the address book, to be capable of

accepting multilevel image data compressed according to the JPEG standard, multilevel image data obtained in a similar manner to the two-level image data described above is compressed according to the JPEG standard and converted into a JFIF form. The resultant image data is then stored in a particular folder of the server connected to the network.

In the case where a destination device is an E-mail server, its mail address is detected from the address book 4051. Two-level image data obtained via the scanner is compressed according to the MMR technique and converted into the TIFF (Tagged Image File Format) form. The resultant image data is transmitted to the E-mail server using the SMTP (Simple Mail Transfer Protocol) 4153 which is well known in the art. After that, the image data is further transmitted from the E-mail server using the mail server module 4550.

3. User Interface

The user interface application is now described below.

Fig. 4 illustrates the outline of the user interface.

3.1 Control Screen

The functions provided by the image processing

apparatus 1001 can be classified into six categories:
Copy, Send, Retrieve, Tasks, Management, and
Configuration, which correspond to six main tabs, COPY,
SEND, RETRIEVE, TASKS, MGMT, CONFIG (3011-3016)

5 displayed at the top of the control screen (refer to
Fig. 14). If one of main tabs is pressed (via a touch
panel), a screen corresponding to the selected category
appears. If the selected category is not allowed, the
color of the pressed tab changes and no other responses
10 occur.

The category "Copy" includes the function, similar
to that provided by a stand-alone copying machine, of
making a copy of a document using the scanner and the
printer included in the image processing apparatus, and
15 also includes the function of making a copy of a
document using the scanner included in the image
processing apparatus and a printer connected to the
image processing apparatus via the network.

The function "Send" sends an image of a document
20 scanned by the scanner included in the image processing
apparatus. The image data can be transmitted to
devices such as a remote printer or into a database in
a device via an E-mail, a facsimile, or an FTP. The
data may be transmitted to a plurality of destinations,
25 if desired.

"Retrieve" acquires a document from an external
device and prints it using the printer included in the

image processing apparatus. The document may be acquired via the WWW, an E-mail, the FTP (File Transfer Protocol), or facsimile transmission.

"Tasks" generates and manages tasks of
5 automatically processing documents received from external devices via facsimile or the Internet and also tasks of periodically retrieving data.

"Management" manages the job address book, bookmarks, documents, and accounting information.

10 "Configuration" sets the image processing apparatus itself (in terms of the network, clock, etc.).

The method of setting these functions is described below with reference to LCD display screens.

15 3.2 ID Input Screen

When the electric power is turned on or when an ID key 2016 is pressed, an ID input window appears (refer to Fig. 15). If an "OK" button 3024 is pressed after
20 correctly inputting a user ID and password via the ID input window, the above-described control screen appears, via which the user can controls the operation. The ID input box (3021) and the password input box (3022) can be selected by directly pressing a desired
25 box. If an invalid (not authorized) ID or password is input, an error message is displayed on the screen as shown in Fig. 16.

3.3 COPY Screen

When the COPY screen is displayed after selecting the COPY tab, if the start key 2014 is clicked, then the scanner starts to operate and copies of a document
5 are output by a selected printer in accordance with the setting parameters (the scaling factor, the paper size, the number of copies) displayed on the screen.

The COPY main screen (refer to Fig. 17) includes a printer selection button (3103) and a printer
10 indication box (3102), an image quality selection button (3105) and an image quality indication box (3104), a copy parameter indication box (3101) similar to that of a stand-alone copying machine, scaling factor setting buttons (3106, 3107), a paper selection
15 button (3108), a sorter setting button (3110), a two-sided copy setting button (3112), an intensity indicator and an intensity setting button (3109), and a ten-key pad (3114).

If the printer selection button (3103) is pressed,
20 a list of names of available printers (the printer included in the image processing apparatus and other printers connected via the network) is displayed in the form of a pull-down menu (refer to Fig. 18). If a desired printer is selected from the list, the list
25 disappears and the selected printer name displayed in the printer indication box (3102).

If the image quality setting button (3105) is

pressed, a list of image qualities (refer to Fig. 19) is displayed so that a desired image quality (photo mode, character/photo mixed mode, character mode) can be selected from the list.

5 If a copy parameter setting button is pressed, a subscreen for setting the conditions (scaling factor, paper selection, sorter setting, two-sided copying setting) corresponding to the pressed button appears, so that the parameters can be set as in a stand-alone
10 copying machine. The intensity setting can also be performed in a similar manner.

3.4 SEND Screen

15 In the SEND screen which appears when the SEND tab is pressed, if the start key 2014 is pressed after selecting a destination, then the scanner start to operate and the image data obtained via the scanner is transmitted to the selected destination by means of the designated transmission method. In the SEND mode, the
20 information about the destination is given by character information and an icon indicating the category of the destination. Depending on the destination, an icon selected from a plurality of icons is displayed at a particular location assigned to that icon so that the
25 category of the destination can be easily identified. This also makes it easy to select a destination and visually identify the selected destination.

The SEND main screen (refer to Fig. 24) includes a destination indication area (3202), a number-of-destinations indication area (3203), a destination scroll button (3204), an address book button (3208), a "New" button (3209), an "Edit" button (3210), a "Delete" button (3211), a subject input box (3205), a message input box (3206), a file name input box (3207), a "Cover Page" check button (3212), a "Put into HD" check button (3213), a "Print Out" check button (3214), and a scan setting button (3215). When the image processing apparatus is initialized for example by pressing a reset key 2017 (see Fig. 4), no destination is displayed in the destination indication box as shown in Fig. 25, but operation instructions are displayed.

The list of destinations displayed in the destination indication area (3202) includes destinations which have already been input. If a new destination is input, it is added at the end of the list. The number-of-destination indication area (3203) indicates the number of currently registered destinations.

If the Delete button (3211) is pressed after selecting a destination from the list displayed in the destination indication area, then the selected destination is deleted from the list.

The subject input box (3205), the message input

box (3206), or the file name input box (3207) is pressed, a full keyboard is displayed as shown in Fig. 26 so that the user can input data via the full keyboard.

5

3.5 Address Book Subscreen

If the address book button (3208) is pressed, an address book subscreen appears (refer to Fig. 27).

After marking desired destinations with a selection mark (3232) on the address book display area (3221), if an "OK" button (3231) is pressed, then those marked destinations are added to the list of destinations displayed in the destination indication area (3202) of the SEND main screen. If one of setting buttons (3224-3226) is pressed, the list of destinations is sorted by the class (the type of output), the name in the ascending order, or the name in the descending order depending on the button pressed. The number-of-selected-destinations indication box (3227) indicates the number of destinations marked with a selection mark.

If the "OK" button (3231) or the "Cancel" button (3230) is pressed, the address book subscreen is closed, and the SEND main screen is displayed.

When one of destinations is selected in the address book, if the "Detail" button (3229) is pressed, then a detail subscreen is displayed (refer to Fig. 28)

and all information about the selected destination extracted from the address book is displayed.

3.6 Search Subscreen

5 If a "Search" button (3228) on the address book
subscreen is pressed, a search subscreen appears (refer
to Fig. 29) whereby the user can search the local
address book provided in the image processing apparatus
or an external address server for a particular
10 destination. The upper area of the search subscreen is
used to designate the searching conditions. The
searching condition designation area includes a class
indication box (3245), an attribute indication box
(3247), a searching condition indication box (3249),
15 and an address book indication box (3252) wherein
current selections are displayed in these boxes. If a
class setting button (3246) is pressed, a list of
classes is displayed (refer to Fig. 30). If one of
classes is selected from the list, the selected class
20 is displayed in the class indication box. If an
attribute setting button (3248) is pressed, a list of
attributes is displayed (refer to Fig. 31). The
contents of this list vary depending on the class
selected, as described below:

25 common name, address, country (class = person)
 common name, owner, location, model, type,
 resolution, color, finisher (class = printer)

common name, member (class = group)

all attributes (class = everything)

If a research condition setting button (3250) is pressed, a list of research conditions is displayed

5 (refer to Fig. 32) so that the user can select a condition from the list. If an address book setting button (3253) is pressed, a list of address books is displayed (refer to Fig. 33) so that the user can select an address book from the list. If an attribute
10 input box (3251) is pressed, a full keyboard is displayed (refer to Fig. 26) so that the user can input desired data via the full keyboard.

If a "Do Search" button (3254) is pressed, a searching operation is started in accordance with the
15 specified search conditions. The search result is displayed in a search result indication area (3241) the number of obtained destinations is displayed in a number-of-obtained-destinations indication area (3244).

20 When one destination is selected from those displayed in the search result indication area, if the "Detail" button (3255) is pressed, then detailed information (3235) about the selected destination is displayed.

25 If there are destinations which should be added to the list of destination, those destinations are marked with a selection mark (refer to Fig. 34). If the "OK"

button (3257) is pressed, the search subscreen is closed and the SEND main screen is displayed in which the list of destinations includes those marked in the search process. In the case where the "Cancel" button (3256) is pressed, the search subscreen is closed and the SEND main screen is displayed without making any change in the list of destinations.

3.7 Destination Subscreen

10 If the "New" button (3209) on the SEND main screen is pressed, then a person class subscreen appears (refer to Fig. 35) so that the user can input a new destination. If one of transmission method selection buttons (3271-3274) corresponding to transmission methods (E-mail, facsimile, printer, FTP) is pressed or one of destination input boxes (3275-3278) is pressed, then a ten-keyboard (Fig. 36) is displayed when the facsimile is selected as the transmission method or a full keyboard (Fig. 26) is displayed when any other transmission method is selected, thereby allowing the user to input data. Although not described in further detail here, there are also provided buttons 3279-3282 used to set the transmission options.

25 When a destination in the person class is selected on the SEND main screen, if the "Edit" button (3210) is selected, the person class subscreen also appears (refer to Fig. 37) and detailed information of the

selected destination is displayed in the corresponding destination input box (3275-3278) (see Fig. 35). In this state, if a keyboard is displayed in the above-described manner, then it becomes possible to edit the destination.

When a destination in the database class is selected on the SEND main screen, if the "Edit" button "3210" is pressed, a database class subscreen appears (refer to Fig. 38) wherein a database name (3311) and a folder list (3312) are displayed on the database class.

When a destination in the group class is selected on the SEND main screen, if the "Edit" button (3210) is pressed, then a group class subscreen appears (refer to Fig. 39) and group members (3321) are displayed.

3.8 HD Setting Subscreen

If a "Put into HD" check button (3213) is pressed, a HD setting subscreen appears (refer to Fig. 40) so that the user can set the conditions in which data is transmitted to a hard disk and stored thereon. When a "Put into HD" check button (3406) provided in common for all categories is pressed, the HD setting subscreen (Fig. 40) also appears and setting can be performed in a similar manner.

3.9 Print-out Subscreen

If a "Print-out" check button (3214) is pressed,

then a print-out subscreen appears (refer to Fig. 41) so that the user can set the number of copies to be printed, the paper size, the scaling factor, the two-sided copying conditions, the sorting conditions, and the resolution. If a paper size selection button (3345) is pressed, a list of paper sizes is displayed (refer to Fig. 42) so that the user can select a desired paper size from the list. If a sorter selection button (3350) is pressed, a list of available sorters is displayed (refer to Fig. 43).

3.10 Scan Setting Subscreen

If a "Scan Setting" button (3215) is pressed, a scan setting subscreen appears (refer to Fig. 44). If one of scan settings is selected from the preset mode selection area (3371), the preset resolution, scan mode, and intensity are displayed in the corresponding indication areas (3377, 3379, 3381). These values can be changed by the user. Fig. 45 illustrates a screen on which a list of paper sizes is displayed in the form of a pull-down menu so that the user can select a paper size and a paper feeding direction from the list. Figs. 46 and 47 illustrate screens where a list of resolutions and a list of scan modes are displayed, respectively, in the form of a pull-down menu.

3.11 Retrieve Screen

The "RETRIEVE" main screen (Fig. 48) includes a "WWW" subtab (3401), an "E-Mail" subtab (3402), a "Fax" subtab (3403), an "FTP" subtab (3404), a "Put into HD" check button (3405) which is used in common in the
5 respective subcategories, and a "PRINT SETTING" button (3406). If one of subtabs is pressed, a WWW, E-Mail, Fax, or FTP subscreen is displayed depending on the subtab pressed. When the image processing apparatus is initialized for example by pressing the reset key 2017,
10 the WWW subscreen is displayed.

3.12 WWW subscreen

When the WWW subscreen is displayed, if the start button is pressed, the contents of the designated home
15 page is printed in accordance with the conditions displayed on the screen. However, if the start key 2014 is pressed when nothing is displayed in a URL input box.

If the URL input box (3411) displayed on the WWW
20 subscreen (Fig. 48) is clicked, a full keyboard (Fig. 26) is displayed so that a URL address is directly input. If a "Link Depth" input box (3412) or a "Max Pages" input box (3414) is clicked, a ten keyboard
(Fig. 36) is displayed so that numerals can be directly
25 input.

3.13 Bookmark Subscreen

If a "Bookmark" button (3419) is pressed, a bookmark subscreen (Fig. 49) appears. The bookmark subscreen includes a bookmark display area (3461) in which a list of bookmarks is displayed. If any line is
5 clicked, the corresponding bookmark is selected. If an "OK" button (3466) is clicked, then the bookmark subscreen is closed and the WWW subscreen again appears wherein a URL address corresponding to the selected
10 bookmark is displayed in the URL input box. The bookmark subscreen includes some other buttons, but their functions are not described here.

3.14 E-Mail Subscreen

The E-mail subscreen (Fig. 50) is used to set
15 conditions in which E-mail is received. If any input box (3431-3433) is clicked, a full keyboard (Fig. 26) is displayed thereby allowing the user to input data.

3.14 Facsimile Subscreen

20 The facsimile subscreen (Fig. 50) is used to input a facsimile number. If an input box (3441) is clicked, a ten keyboard (Fig. 36) is displayed thereby allowing the user to input a facsimile number.

25 3.15 FTP Server Subscreen

The FTP server subscreen (Fig. 52) is used to set conditions in which data is received from a server. If

any input box (3451-3453) is clicked, a full keyboard (Fig. 26) is displayed thereby allowing the user to input data.

5 3.15 Print Setting Subscreen

If a "Print Setting" button (3406) provided for common use in all categories is clicked, a print setting subscreen (Fig. 53) appears. This has functions similar to those of the print-out subscreen in the "SEND" screen.

3.16 "TASKS" Screen

When the "TASKS" screen is displayed as a result of selecting the "TASKS" tab, if the "Start" key 2014 is clicked, then data is automatically retrieved according to the parameters set on the "TASKS" screen.

The "TASKS" main screen (Fig. 54) includes a "WWW" subtab (3501), an "E-Mail" subtab (3502), a "Print Receive" subtab (3503), a "Fax Receive" subtab (3504), and a "Fax Polling" subtab (3505). In the initial state immediately after starting the image processing apparatus or after resetting it by pressing the reset key (2017), a WWW subscreen (Fig. 55) is displayed.

25 3.17 WWW Subscreen

The WWW subscreen includes a WWW task display area (3511) in which a list of tasks stored in the device is

displayed in the same order in which they are input. Those tasks which should be actually executed are marked with a selection mark. Tasks which are not marked with a selection mark are not executed although they are stored in the device.

If a "New" button (3513) is clicked, a WWW task subscreen (Fig. 55) appears so that the user can input a new task. The WWW task subscreen is described in detail later.

If an "Edit" button (3514) is clicked after selecting one task from the WWW task list, the WWW task subscreen (Fig. 55) including information about the selected task is displayed so that the user can edit the setting.

After selecting a task from the WWW task list, if a "Delete" button (3515) is clicked, then the selected task is deleted.

3.18 WWW Task Subscreen

The WWW task subscreen (Fig. 55) includes components (3521-3533) which are common for both the RETRIEVE main screen and the WWW subscreen in the RETRIEVE mode, a check time indication area (3534), a check time setting button (3535), a "Print When Changed" check button (3536), a transfer check button (3537), an "OK" button (3539), and a "Cancel" button (3538). The components which are similar to those in

the "RETRIEVE" screen are not described here.

The check time indication area (3534) includes no data when the WWW task subscreen is opened by clicking the "New" button, but it indicates the time at which the task is set to be executed in the case where the WWW task subscreen is opened by clicking the "Edit" button. In the case where setting is performed on the check time subscreen which will be described later, the time at which the task is set to be executed is indicated.

If the check time setting button (3535) is clicked, then the check time subscreen which will be described later is displayed so that the user can set the time at which the task should be executed.

3.19 Check Time Subscreen

The check time subscreen (Figs. 56-58) includes a schedule mode setting buttons (3551-3553), a time input box (3554), an "OK" button (3558), and a "Cancel" button (3557). When a "Once" button (3551) of the schedule mode setting buttons is selected (refer to Fig. 56), a month inputting box (3555) and a date inputting box (3556) are displayed. When a "Weekly" button (3552) is selected (refer to Fig. 57), day-of-week check buttons (3561) are displayed. When a "Monthly" button (3553) is selected (refer to Fig. 58), a data input box (3571) is displayed. If any input box

is clicked, then a ten keyboard (Fig. 36) is displayed so that the user can input numerals. A plurality of days of week can be selected by clicking a plurality of day-of-week check buttons.

5

3.20 MGMT Screen

Fig. 59 illustrates a management screen which is displayed when the "MGMT" tab is selected. This screen indicates information of various items managed, although they are not further described herein.

10

3.21 CONFIG Screen

Fig. 60 illustrates a configuration screen which indicates information about various settings of the image processing apparatus 1001 although they are not described in further herein.

15

3.22 Full Keyboard

When a character input box is clicked, a full keyboard (Fig. 26) is displayed on the current screen (so that the character input box is not hidden by the full keyboard). If a "www." button (3041) or a "com" button (3042) is clicked, a string of "www." or "com" is input. These buttons are convenient because "www." and "com" are frequently input. Other keys for providing well-known functions are not described here.

20

25

3.23 Ten Keyboard

When a numeral input box or a month input box is clicked, a ten keyboard (Fig. 36) is displayed on the current screen (so that the numeral input box or the month input box is not hidden by the ten keyboard).
The functions of keys are not described here.

3.24 Error Screen

If some error occurs, an error screen appears as shown in Fig. 16.

The error screen includes a message indication area (3031) in which an error message in the form of a text is displayed and also includes an "OK" button (3032) used to close the error screen.

4. Device Information Service (DIS)

Herein, a device information service (DIS) refers to a database including information about the setting values for jobs performed by the controller of the image processing apparatus 1001, functions of devices (scanner, printer), status, and accounting information in the form according to the control API. The DIS also include an I/F with that database. A similar program (a required part of the program) may also be installed in other apparatus to realize similar functions.

Fig. 61 illustrates data flow among the DIS 7102, the job manager 7101, and the document managers (the

scan manager 7103, the print manager 7104).

Dynamic information such as a job start command is basically transmitted from the job manager 7101

directly to a document manager. On the other hand,

5 static information such as device functions or contents of a job is obtained by referring to the DIS 7102.

Static and dynamic information and events from the respective document managers are transmitted to the job manager 7101 via the DIS 7102.

10 When a document manager stores or reads data into/from the database of the DIS, it is required to convert the data format because the data format according to the control API is employed as the internal data format of the DIS. That is, it is
15 required to convert the data format between the control API format and the format acceptable by the document managers. For example, when a document manager writes a status data in the DIS, the document manager interprets the data in a specific form employed in a
20 specific device, and converts the data into the format defined in the control API. After that, the resultant data is written into the database of the DIS.

When the job manager writes or reads data into/from the database of the DIS, it is not required
25 to convert the data format.

The DIS updates the event data in accordance with event information received from the document managers.

Fig. 62 illustrates various databases included in the DIS. The respective databases are described below. In Fig. 62, boxes with rounded corners denote databases.

5 A supervisor database 7201 includes general information about the image processing apparatus 1001 and also includes user information. Information such as a user ID or a password which needs backup is stored on a hard disk or in a nonvolatile storage device such
10 as a backup memory.

Reference numeral 7202 denotes a scan component database, and 7203 denotes a print component database. One component database is created for each component, and stored in the DIS. For example, in the case of a
15 device including only a printer, there is only a print component database. On the other hand, in the case of a device having a facsimile function, there is a facsimile component database. That is, when an apparatus does not have as many functions as the image
20 processing apparatus 1001, only required components may be provided in the apparatus so as to achieve desired functions according to the invention. The functions and status of the respective component databases are set by the corresponding document managers when they
25 are initialized.

Reference numeral 7204 denotes a scan job service database, and 7205 denotes a print job service

database. The functions and supporting conditions of these job service databases are also set by the corresponding document managers when they are initialized, as in the case of the component databases.

5 The job database and the document database are described below. Reference numeral 7206 denotes a scan job database 7207 denotes a print job database, 7208 denotes a scan document database, and 7209 denotes a print document database.

10 Whenever a job and associated document are generated, the job manager dynamically creates a job database and a document database and initializes these databases thereby performing required settings. Before starting to execute a job, the document manager reads
15 required information from the job database and the document database. The document then begins the job in accordance with the obtained information. When the job is completed, the job database and the associated document database are released. Because each job has
20 one or more documents, a plurality of document databases may be created depending on the job.

 Reference numeral 7210 denotes a database for storing event information received from the respective document managers. Reference numeral 7211 denotes a
25 counter table for storing the data representing the number of scanning operations and the number of printing operations performed by the image processing

apparatus 1001.

Events generated by the document managers includes status transitions of components, completion of a scanning process, various errors, generated by the scan
5 document managers, and status transitions of components, completion of a printing process, paper jamming, and paper cassette opening generated by the print document manager. Event ID's are assigned to the respective events to identify these events.

10 When an event is issued by the document manager, the DIS writes the event ID assigned to the issued event and also the detailed data associated with the event, if necessary, into the event database 7211. On the other hand, when an event release message is issued
15 by the document manager, the data of the specified event is removed from the event database 7211.

If the job manager issues an event of polling, the DIS refers to the event database 7211 and returns the event ID's of currently occurring events and detailed
20 data associated with the events, if necessary, to the job manager. If there is no event, the DIS notifies the job manager that there is no event.

In the case where a scan process end event or print process end event is received, the DIS updates
25 the count values of the users who have performed the scan or print operation. The count values of these software counters are stored in a nonvolatile storage

device such as a battery-backup memory or an HD device so that the values are not lost even if a power failure occurs. The values are rewritten in the nonvolatile storage device whenever the values are updated.

5

5. Scanning Operation

The scanning operation is described in detail below. Although in the following description it is assumed that a document is scanned by the scanner 2070 of the image processing apparatus 1001, a similar scanning operation may also be performed by another scanner.

Fig. 63 is a conceptual block diagram illustrating the scanning operation. A CPU 8101, a memory (semiconductor memory) 8102, an image compression/decompression board 8104, and a SCSI I/F circuit 8103 are connected to a PCI bus 8105. A scanner 8107 is connected to PCI bus 8105 via the SCSI I/F circuit 8103 wherein the scanner 8107 (or a scanner unit of a multifunctional copying machine) and the SCSI I/F circuit 8103 are connected to each other via a SCSI interface cable 8106.

Furthermore, an IDE controller 8108 is connected to the PCI bus 8105 and an IDE hard disk 8101 is connected to the IDE controller 8108 via an IDE cable 8109. Fig. 64 illustrates the software structure involved in the scanning operation. In Fig. 64, a job

manager 8201 classifies application levels and stores them. A DIS 8208 stores parameters required by the application levels in the scanning operation. A request from an application is stored in the memory

5 8102. A scan manager 8203 acquires information required in the scanning operation from the job manager 8201 and the DIS 8202. The scan manager 8203 receives from the job manager 8201 a table data 8301 including a job number and a document number, shown in Fig. 65. On

10 the basis of the table data 8301 including the job number and the document number, the scan manager 8203 receives scan parameters 8302. Thus the scanning conditions requested by the application are determined, and a document is scanned under these conditions

15 thereby reading an image of the document.

The scan manager 8203 sends the scan parameters 8302 obtained from the DIS 8202 to a scan sequence controller 8204 in the order of document numbers. If the scan sequence controller 8204 receives the scan

20 parameter 8302, the scan sequence controller 8204 controls a SCSI controller 8207 according to the scan image attribute 8308. The SCSI controller 8103 connected to the PCI bus 8105, shown in Fig. 63, sends a SCSI control command to the scanner 8107 via the SCSI

25 cable 8106. In response, the scanner 8107 starts a scanning operation. The image data obtained via the scanning operation is transferred to the SCSI

controller 8103 via the SCSI cable 8106 and further to the memory 8102 via the PCI bus 8105 and stored in the memory 8102. When the image data has been stored in the memory 8102 after completion of the scanning operation, the scan sequence controller 8204 issues a request to a compression/decompression unit 8205 to compress the image data stored in the memory 8102 in accordance with the scan image compression format 8309 included in the scan parameters 8302. Upon receipt of the request, the compression/decompression controller 8205 compresses the image data using the CODEC 8104 connected to the PCI bus 8105 in accordance with the scan image compression format 8309 specified by the scan sequence controller 8204. The compression/decompression controller 8205 stores the resultant compressed image data into the memory 8102 via the PCI bus 8105.

If the image data has been stored in the memory 8102 after being compressed by the compression/decompression controller 8205 in accordance with the scan image compression format 8309, the scan sequence controller 8204 converts the compressed image data stored in the memory 8102 into file data according to the image file type 8307 included in the scan parameters 8302. To this end, the scan sequence controller 8204 issues a request to a file system 8206 to convert the image data to file data according to the

file format indicated by the image file type 8307 included in the scan parameters 8302. In response to the request, the file system 8206 converts the compressed image data stored in the memory 8102 to file data according to the image file type 8307 specified by the scan sequence controller 8204. The resultant file data is transferred to the IDE controller 8108 via the PCI bus 8105 and further to the IDE hard disk 8110 via the IDE cable 8109. When the file data has been stored on the IDE hard disk 8110 by the file system 8206, the scan sequence controller 8204 determines that the process for one document on the scanner 8107 has been completed, and the scan sequence controller 8204 send a scan end message to the scan manager 8203.

If the scanner 8107 has another documents to be scanned, and if there is another scan request from the job manager 8201, then the scan manager 8203 again issues a request to the scan sequence controller 8204 to perform a scanning operation according to the scan parameters 8302 stored in the DIS 8202.

If the scanner 8107 has no more documents to be scanned, or if there is no scan request from the job manager 8201, the scan manager determines that the scanning operation has been completed and issues a scan end message to the job manager 8201.

6. Printing Operation

The printing operation is now described in detail below. Although in the following description it is assumed that an image is printed by the printer 2095 of the image processing apparatus 1001, a printing operation may also be performed in a similar manner by another printer.

Fig. 66 is a conceptual block diagram illustrating the printing operation. A CPU 9001, a memory 9002, an image compression/decompression board 9004, and an engine I/F board 9003 are connected to a PCI bus 9005. A printer 9007 is connected to PCI bus 9005 via the engine I/F board 9003 wherein the printer 9007 (or a printer unit of a multifunctional copying machine) and the engine I/F board 9003 are connected to each other via an engine interface cable 9006.

The engine I/F board includes a DPRAM so that setting of parameters of the printer, reading of the status of the printer, and transmission/reception of control commands to/from the printer are performed via the DPRAM. The engine I/F board also includes a video controller for transmitting image data on the PCI to the printer via the engine interface cable in synchronization with VCLK (video clock) and HSYNC signals given by the printer via the engine interface cable, as illustrated in the transmission timing diagram shown of Fig. 67. The VCLK signal is always generated, but the HSYNC signal is generated when the

printer starts each line. The video controller reads image data with a specified width (WIDTH) from a specified memory (SOURCE) on the PCI and outputs the obtained image data as a video signal over the engine interface cable. After performing the above process for a specified number of lines (LINES), the video controller generates an IMAGE_END interruption.

As described above, when a print job request is sent from an application program on the CPU to the control API, the control API transfers the print job request to the job manager at the controller level. Furthermore, the job manager stores the data representing the setting of the job in the DIS, and sends a command to the print manager to start the job. Upon receipt of the job, the print manager reads the information required to execute the job from the DIS and sets the engine I/F board and the printer via the DPRAM.

Fig. 68 illustrates the parameters associated with the engine I/F board, and Fig. 69 illustrates the parameters, control commands, and status commands transmitted via the DPRAM of the printer.

The operation is described in further detail below. For simplicity, it is assumed that the job is to print one set of two pages of two-level images which are not compressed and which have a letter size (11" x 8.5") and it is also assumed that the printer is

capable of printing an image with a resolution of 600 dpi.

Upon receipt of the job, the print manager calculates the number of bytes present along the width (8.5" in this specific example) of the image.

5

$\text{width} = 8.5 \times 600 \div 8 \approx 630 \text{ (bytes)}$

The print manager then calculates the number of lines as follows.

$\text{the number of lines} = 11 \times 600 = 6600 \text{ (lines)}$

10

These values calculated here and the SOURCE address at which the first page of image data is stored are substituted into variables WIDTH, LINES, and SOURCE shown in Fig. 68. Now the engine I/F board is ready to output image data, but no HSYNC signal is transmitted from the printer (although the VCLK signal is transmitted) and thus the engine I/F board has not started to output image data yet.

15

The print manager writes "1" representing the number of copies to be printed into the DPRAM shown in Fig. 69 at a predetermined address (BookNo). After that, the print manager outputs a paper feeding request (FEED_REQ) for the first page, and waits for an IMAGE_REQ request from the printer. Upon receipt of IMAGE_REQ from the printer, the printer manger outputs an IMAGE_START command. In response, the printer starts to output the HSYNC signal, and the engine I/F board waiting for the HSYNC signal now starts to output

25

image data. If the printer detects the trailing end of the paper, the printer outputs an IMAGE_END signal. Furthermore, when the paper is fed out, the printer outputs a SHEET_OUT signal. If the print manager
5 receives the IMAGE_END signal associated with the first page, the print manger sets the engine I/F board in terms of WIDTH, LINES, and SOURCE for the second page. After that, the print manager outputs a FEED_REQ request and waits for an IMAGE_REQ request. After
10 receiving the IMAGE_REQ request for the second page, the operation is performed in a similar manner to the first page.

Image data transmitting process of the image processing apparatus 1001 having the foregoing
15 construction will be described hereinbelow.

A discrimination about transmitting conditions will be described in detail as an example with respect to the case of transmitting data to a personal computer (PC) on the third floor of a research building shown in
20 Fig. 72.

A transmitting condition discriminating program shown in Fig. 70 is activated and loaded into the RAM 2002 by the CPU 2001 of the image processing apparatus 1001 at the time of transmission of the image data. In
25 the transmitting condition discriminating program, when a transmission of the image data is instructed, a total capacity of the image data to be transmitted (image

data inputted by the scanner 2070 or the like) is first read out. It is now assumed that it is equal to 2.6 Mbytes. Subsequently, an information route to PC "RESEARCH BLDG. 3RD FL. PC" on the third floor of the research building designated as a destination is read out from a destination information table 7200 shown in Fig. 72. In this case, it will be understood that the information route from the image processing apparatus 1001 (apparatus name is AMANDA) according to the embodiment to the PC on the 3F of the research building is the LAN and based on 10 Base.

It is expressed at the lowest speed in a range from the transmitting source of the image data to the PC on the 3F of the research building. This is because even if most of the information routes are based on 100 Base, when there is at least one location connected by 10 Base, this value of 10 Base becomes a bottle neck as a whole.

Subsequently, a permissible capacity (namely, permissible data amount) of the 10 Base LAN is read out from an information route permissible capacity table 7100 shown in Fig. 71. It is equal to 1 Mbytes. Therefore, on the basis of the transmitting condition discriminating program shown in Fig. 70, the CPU 2001 determines that the capacity (2.6 Mbytes) of the image data exceeds the permissible capacity (1 Mbytes) of the information route (S10). The target image data is not

transferred here as a second mode (when there is a transmitting instruction, the image data is not transmitted but information showing the existing location of the image data and the access manner is transmitted, and the image data is transmitted by a method different from that of the information on the basis of an instruction from the destination side), and this image data is stored to a predetermined location on the hard disk as a temporary file "971214_005" (S11). The file name "971214_005" of the image data in this instance indicates the file at the date at the time of transmitting instruction, namely, the fifth file of December 14, 1997, and this file name is automatically formed.

The various tables shown in Figs. 71 and 72 are stored in the hard disk provided for the image processing apparatus 1001 and the permissible data amount corresponding to each information route included in the table shown in Fig. 71 is preset by the user (for example, administrator).

When the permissible data amount is set, the user sets the permissible amount of data (namely, permissible data amount) which is transmitted or received every information route so that no influence is exerted on the network environment of the partner destination and the time that is required to collect the data on the partner destination side is not longer

than it is needed. The image processing apparatus 1001 itself can transmit or receive information to/from the other apparatus and can also automatically set it.

The temporary file is deleted after the elapse of
5 a predetermined time from the completion of the read access to the image data. The temporary file is distinguished from the other files by the following method. That is, assuming that the stored directory is /temp_image, it is a temporary file, otherwise, it is
10 not the temporary file.

Message data showing a method of accessing to the file stored in a predetermined memory area on the hard disk is subsequently formed (S12). This message data has a construction as shown in, for example, Fig. 73.
15 A message indicating that the transfer of the image was stopped because an image size is too large and that the image has been stored is written in the title. The access manner to the storing location and, if necessary, a log-in name and a password are also
20 written as a storing source access manner. The message data is developed in the RAM 2002 by the CPU 2001. Subsequently, the message data is transmitted to the designated destination as information regarding the image data to be transmitted (S13).

25 When the user of the destination reads the message data and accesses to AMANDA as a storing location by ftp by using, for example, an existing Web browser or

the like, the CPU 2001 deletes /tem_image/971214_005 at the time point of completion of ftp.

When the total capacity of the image data does not exceed the permissible capacity up to the destination (S10), whether the ability that is required for image reconstruction of the image data to be transmitted next exceeds the ability of the destination or not is discriminated on the basis of a destination information table in Fig. 72 (S20).

10 When the image data does not exceed the ability of the destination, the image data is transmitted as it is as a first mode (S30).

When it exceeds the ability of the destination, message data is transmitted to the destination of the transmission by the processes in steps S11 to S13 as a second mode in a manner similar to that mentioned above.

As ability information to discriminate whether the apparatus of the destination can process the image data or not, besides the permissible data amount of the communication route mentioned above, a data capacity which can receive by an information processing apparatus of the destination (apparatus such as personal computer, workstation, or the like for processing the image data by word processor software, drawing software, or the like), for example, a capacity of the hard disk and a capacity of the memory can be

also included. Further, color information (for example, the number of colors such as 16 colors, 256 colors, etc. which can be handled, resolution) which can be handled by the information processing apparatus
5 of the destination can be included.

In the foregoing embodiment, although the data stored temporarily in the image processing apparatus is deleted (erased) on the basis of an action of the partner destination, it can be also erased by an
10 instruction by the user from the control panel 2012 of the image processing apparatus. Moreover, the presence or absence of the access from the destination is monitored by the CPU 2001 and when there is no access even after the elapse of a predetermined period of
15 time, the image data can be also automatically erased by the CPU 2001.

As for the image data which cannot be processed by the destination, when there is no access even after the elapse of a predetermined period of time, the image
20 data can be also stored in a detachable recording medium from the own image processing apparatus. In this case, the user is promoted to set a floppy disk or a magneto-optic disk and the image data is written to those recording media by a floppy disk drive or a
25 magneto-optic disk drive on the basis of the control of the CPU 2001 by an instruction from the control panel.

The message to be transmitted to the destination

can have a format of data which can be processed by the destination. For example, if there are limitations in the number of colors and the resolution, message data according to the limitation is formed.

5 An image of a bit map or a character code like an ordinary E-mail can be used as a message. If the user wants to transmit a part of the image data by using the E-mail, it is sufficient to transmit a part of the image data by a format of an annexed file like MIME.

10 As will be obviously understood from the above description, in the embodiment, the attributes (total capacity, color information, and the like of the image data) of the inputted image data as a transmission target, the attributes of the destination and the
15 attribute of the destination (permissible data amount of the information route, color information which can be handled) are compared, and the transmission of the image data is controlled on the basis of results of the comparison, so that a more comfortable environment can
20 be provided for the user by a simple construction.

 In a state where the transmission of the image data is not performed at the time of the instruction of the transmission but the desired image data is stored as a temporary file in the predetermined memory area by
25 the processes in the second mode, if the read access to the file is performed from the user on the destination side, this file is deleted (namely, erasing process to

the file) at the time point after the elapse of a predetermined time from the completion time point of the access from the user as mentioned above. However, the invention is not limited to it but the file can be also deleted synchronously with the timing of the first automatic clearing process performed after the completion of the access.

Besides character information (the storing location of the image data, the access manner to the storing location, the log-in name, the password, etc.) as shown in Fig. 73 as message data, image data (namely, image information) of the representative page, for example, the first page (head page) can be also added to the message data with reference to Fig. 74. In this case, the message data as described in the process in step S12 in Fig. 70 is formed by the CPU 2001. Further, an editing process (for example, a zooming process to the image data) is performed so that the image data of the first page is enclosed in the blank of the message data. The image data subjected to the editing process is added to the message data. As image data to be added, image information expressed in color which can be handled by the apparatus of the transmission destination can be used.

Image data (image information) of a plurality of pages (in the diagram, four pages) can be also added to the message data with reference to Fig. 75. Also in

this case, message data is formed in a manner as described in the process in step S12 in Fig. 70. Further, an editing process (zooming process, layout process, etc.) is performed so that image data of a plurality of pages is enclosed in the blank of the message data. The image data of a plurality of pages subjected to the editing process is added to the message data.

According to the image processing apparatus as described above, besides the ordinary copying function, in the case where the read image of the image processing apparatus is transferred to the other apparatus connected by the LAN or the like, before the image which cannot be processed by the other apparatus is transmitted from the image processing apparatus, a message indicative of the existence of the image is transmitted. Thus, a situation such that the image data which cannot be processed by the other apparatus side is unwillingly received and a trouble is caused does not occur. A fact that the read image cannot be processed can be also known by the message.

A processing ability of the other information processing apparatus is set to the data capacity, image data capacity, or color information which can be processed on the communication route, thereby enabling the present invention to cope with various information processing apparatuses.

The read image which cannot be processed by the other apparatus is stored in a detachable medium, so that the user can extract the stored image and process it by the apparatus which can process it.

5 By automatically erasing the stored image data, the erasure instructing operation by the user can be made unnecessary.

10 A message showing that the user wants to provide an image and a message showing the storing location, log-in, password, and the like of the image data are included in the transmission message, so that the user of the destination can know the existence of the image data and the information that is necessary to extract the image data.

15 Either the first mode or the second mode can be selectively executed on the basis of the attribute of the image data and the attribute information of the external apparatus, for example, the total data amount and the like of the image data to be transmitted.

20 Since a part of the image data of a plurality of pages is added to the message, the user of the external apparatus can specify an outline of the image.

25 The invention can be applied to a system comprising a plurality of apparatuses (for example, a host computer, an interface apparatus, a reader, a printer, etc.) or can be also applied to an apparatus comprising one apparatus (for example, a copying

apparatus, a facsimile apparatus, a personal computer, or the like).

The invention also incorporates a case where program codes of software to realize the functions of the embodiments mentioned above are supplied to a computer in an apparatus or a system connected to the various devices so as to make the various devices operative in order to realize the functions of the embodiments mentioned above, and the various devices are made operative by the computer (a CPU or an MPU) of the system or apparatus in accordance with a stored program, thereby embodying the invention.

In this case, the program codes themselves of the software realize the functions of the embodiments mentioned above, and the program codes themselves and means for supplying the program codes to the computer, for example, a memory medium in which the program codes have been stored construct the invention.

As a memory medium for storing the program codes, for example, it is possible to use a floppy disk, a hard disk, an optical disk, a magnetooptic disk, a CD-ROM, a magnetic tape, a non-volatile memory card, an ROM, or the like.

The program codes are also incorporated in the embodiments of the invention in not only a case where the functions of the embodiments mentioned above are realized by executing the program codes supplied by the

computer but also a case where the program codes
realize the functions of the embodiments mentioned
above in cooperation with the OS (Operating System)
which operates in the computer or another application
5 software or the like.

Further, the invention also incorporates a case
where the supplied program codes are stored in a memory
equipped for a function expanding board of a computer
or a function expanding unit connected to the computer
10 and, thereafter, a CPU or the like equipped for the
function expanding board or function expanding unit on
the basis of instructions of the program codes executes
a part or all of the actual processes, and the
functions of the embodiments mentioned above are
15 realized by those processes.

Although the present invention has been described
with respect to the preferred embodiments, the
invention is not limited to the foregoing embodiments
but many modifications and variations are possible
20 within the spirit and scope of the appended claims of
the invention.

WHAT IS CLAIMED IS:

1. A data transmission apparatus comprising:
input means for inputting data;
transmission means for transmitting the data input
5 by said input means;
discrimination means for discriminating an
attribute of the data input by said input means; and
control means for controlling a transmission
operation by said transmission means in accordance with
10 a discrimination result by said discrimination means,
wherein said control means controls a transmission
route of the data input by said input means in
accordance with the discrimination result by said
discrimination means.
15
2. An apparatus according to claim 1, wherein said
control means switches a mode to directly transmit the
data input by said input means to a destination and a
mode to store said data to a predetermined location and
20 hand it to the destination in accordance with the
discrimination result by said discrimination means.
3. An apparatus according to claim 2, wherein in
the case where the data input by said input means is
25 handed to the destination, said transmission means
transmits a message indicative of an access manner of
the data to the destination.

4. An apparatus according to claim 1, wherein said discrimination means discriminates a data amount of the data input by said input means.

5 5. A data transmission apparatus comprising:
 input means for inputting data;
 transmission means for transmitting the data input
by said input means to a destination;
 discrimination means for discriminating the
10 destination; and
 control means for controlling a transmission
operation by said transmission means in accordance with
a discrimination result by said discrimination means,
 wherein said control means controls a transmission
15 route of the data input by said input means in
accordance with the discrimination result by said
discrimination means.

20 6. An apparatus according to claim 5, wherein said discrimination means discriminates a connecting format to the destination.

25 7. An apparatus according to claim 5, wherein said discrimination means discriminates a processing ability of a device of the destination.

 8. An apparatus according to claim 5, wherein said

control means switches a mode to directly transmit the data input by said input means to the destination and a mode to store said data to a predetermined location and hand it to the destination in accordance with the discrimination result by said discrimination means.

9. An apparatus according to claim 8, wherein in the case where the data input by said input means is handed to the destination, said transmission means transmits a message indicative of an access manner of the data to the destination.

10. A data transmitting method comprising:
input step of inputting data;
transmission step of transmitting the data input by said input step;
discrimination step of discriminating an attribute of the data input by said input step; and
control step of controlling a transmission operation by said transmission step in accordance with a discrimination result by said discrimination step, wherein in said control step, a transmission route of the data input by said input step is controlled in accordance with the discrimination result by said discrimination step.

11. A data transmitting method comprising:

input step of inputting data;
transmission step of transmitting the data input
by said input step;

discrimination step of discriminating a
5 destination; and
control step of controlling a transmission
operation by said transmission step in accordance with
a discrimination result by said discrimination means,
wherein in said control step, a transmission route
10 of the data input by said input step is controlled in
accordance with the discrimination result by said
discrimination step.

12. A computer-readable program stored in a storage
15 medium, comprising:

input step of inputting data;
transmission step of transmitting the data input
by said input step;
discrimination step of discriminating an attribute
20 of the data input by said input step; and
control step of controlling a transmission
operation by said transmission step in accordance with
a discrimination result by said discrimination step,
wherein in said control step, a transmission route
25 of the data input by said input step is controlled in
accordance with the discrimination result by said
discrimination step.

13. A computer-readable program stored in a storage medium, comprising:

input step of inputting data;

transmission step of transmitting the data input

5 by said input step;

discrimination step of discriminating a destination; and

control step of controlling a transmission operation by said transmission step in accordance with

10 a discrimination result by said discrimination step,

wherein in said control step, a transmission route of the data input by said input step is controlled in accordance with the discrimination result by said discrimination step.

15

ABSTRACT OF THE DISCLOSURE

The image data transfer apparatus and its method are provided. The data transmission apparatus comprises an input means, a transmission means for transmitting the data input by said input means, discrimination means for discriminating an attribute of the data input by the input means, and control means for controlling a transmission operation by the transmission means in accordance with a discrimination result by the discrimination means, wherein the control means controls a transmission route of the data input by the input means in accordance with the discrimination result by the discrimination means.

FIG. 1

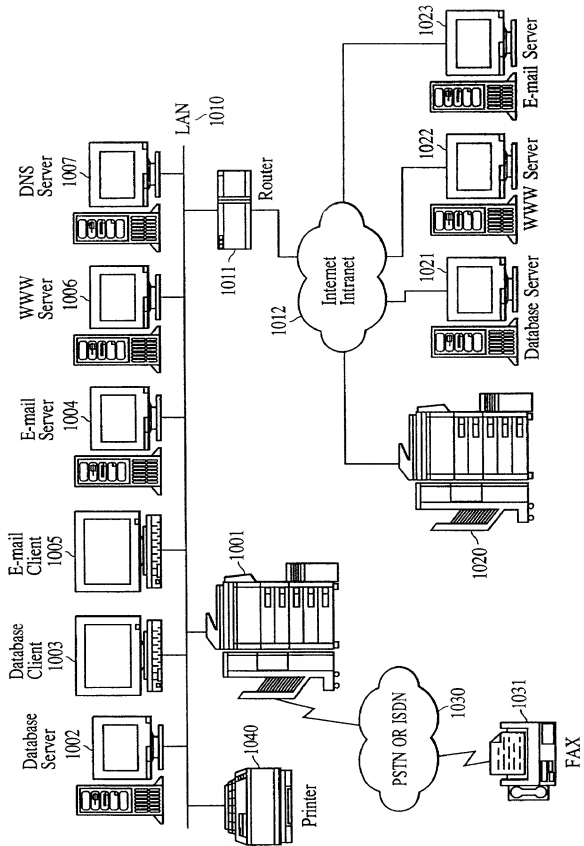


FIG. 2

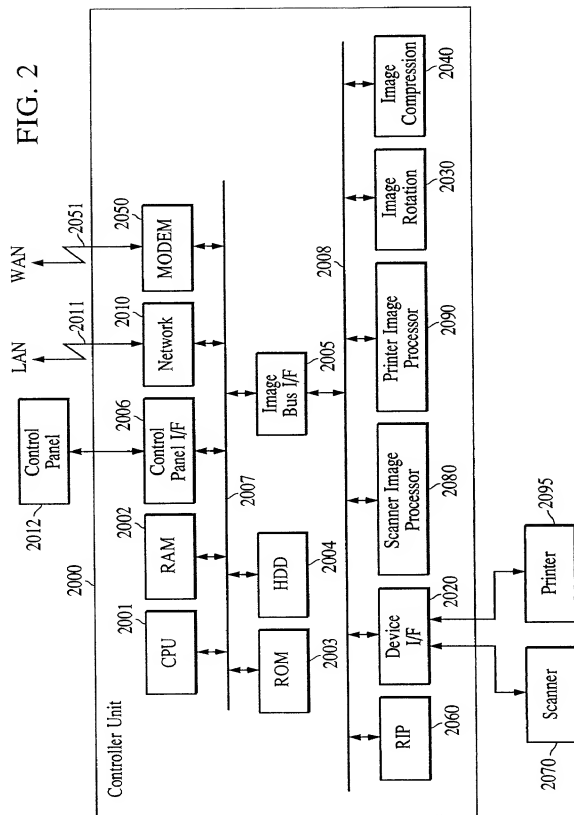


FIG. 3

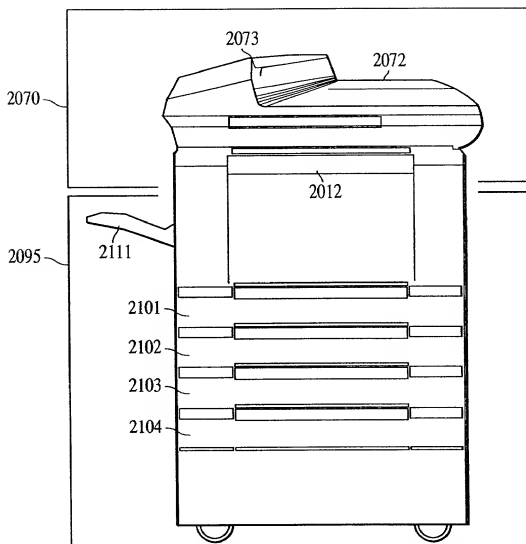


FIG. 4

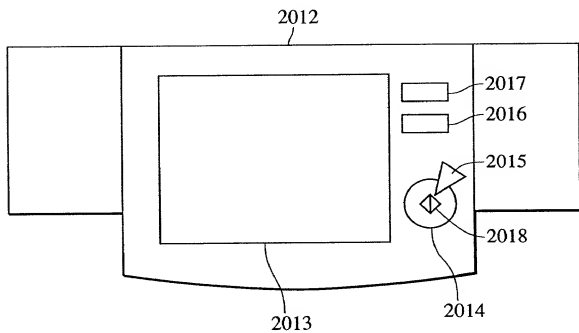


FIG. 5

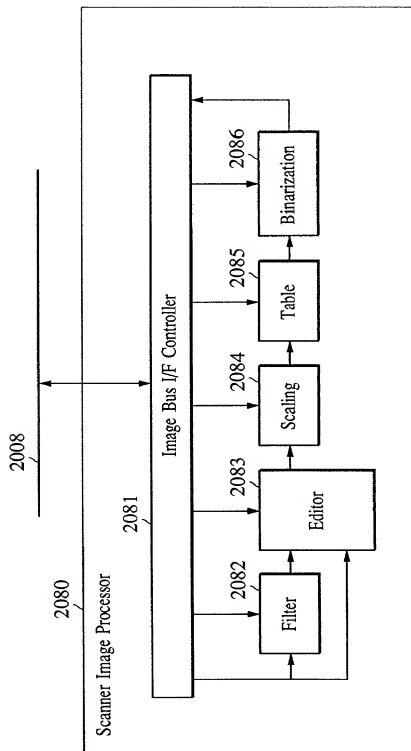


FIG. 6

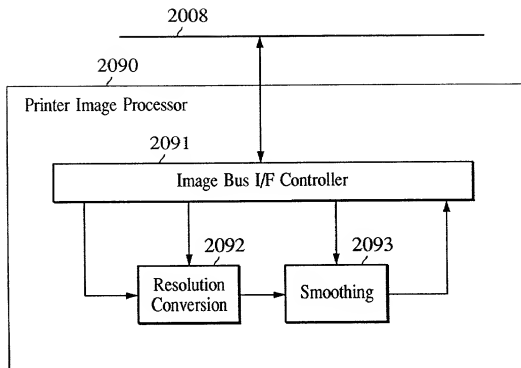


FIG. 7

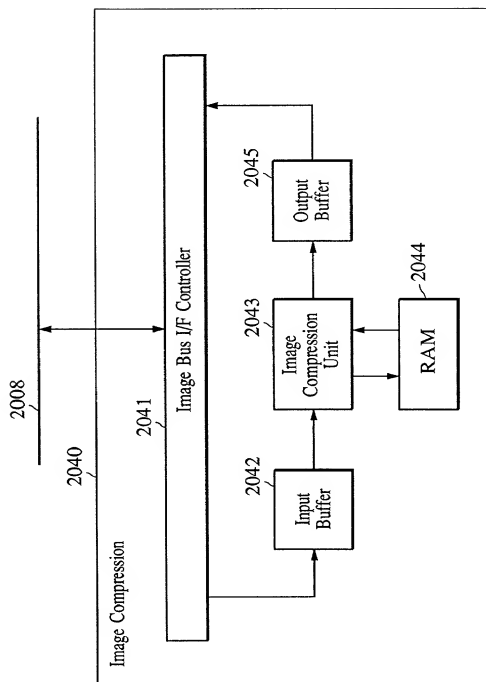


FIG. 8

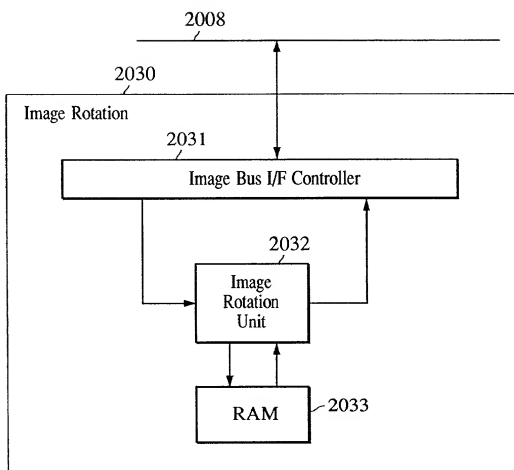


FIG. 9

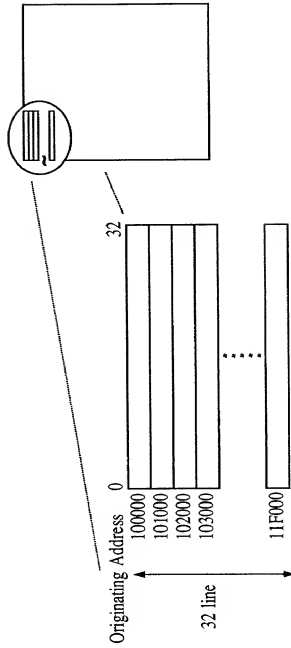



FIG. 10

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32

⋮



1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
9	9	9
10	10	10
11	11	11
12	12	12
13	13	13
14	14	14
15	15	15
16	16	16
17	17	17
18	18	18
19	19	19
20	20	20
21	21	21
22	22	22
23	23	23
24	24	24
25	25	25
26	26	26
27	27	27
28	28	28
29	29	29
30	30	30
31	31	31
32	32	32

...


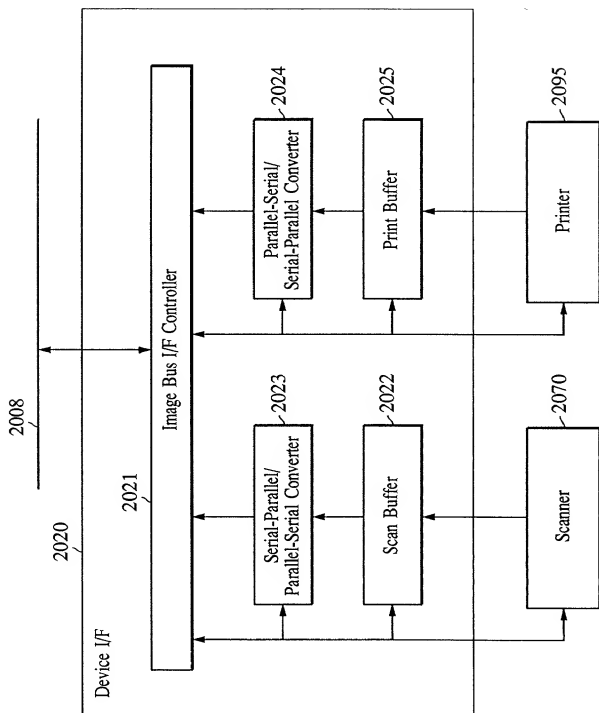


FIG. 11



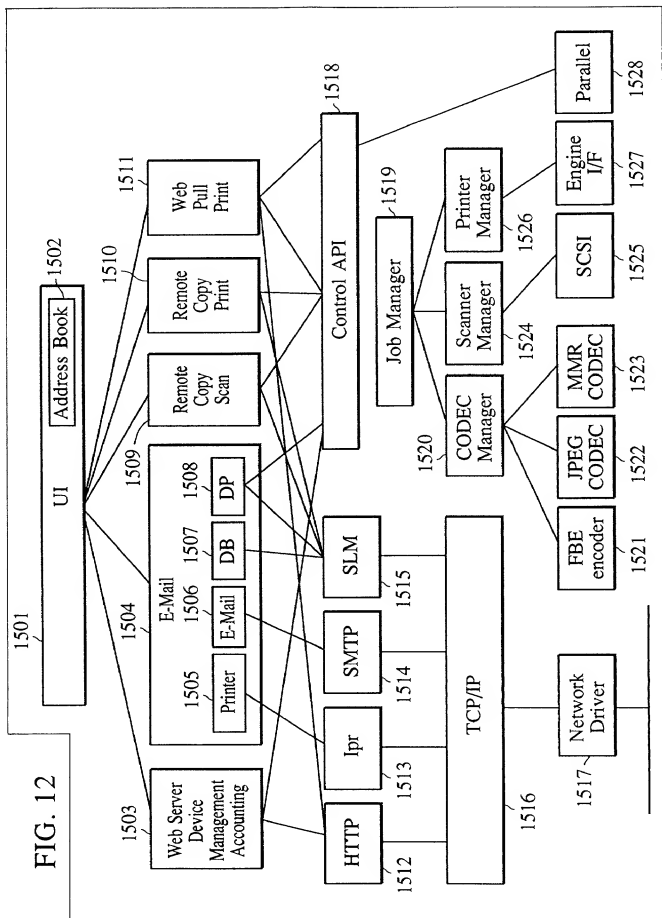


FIG. 13

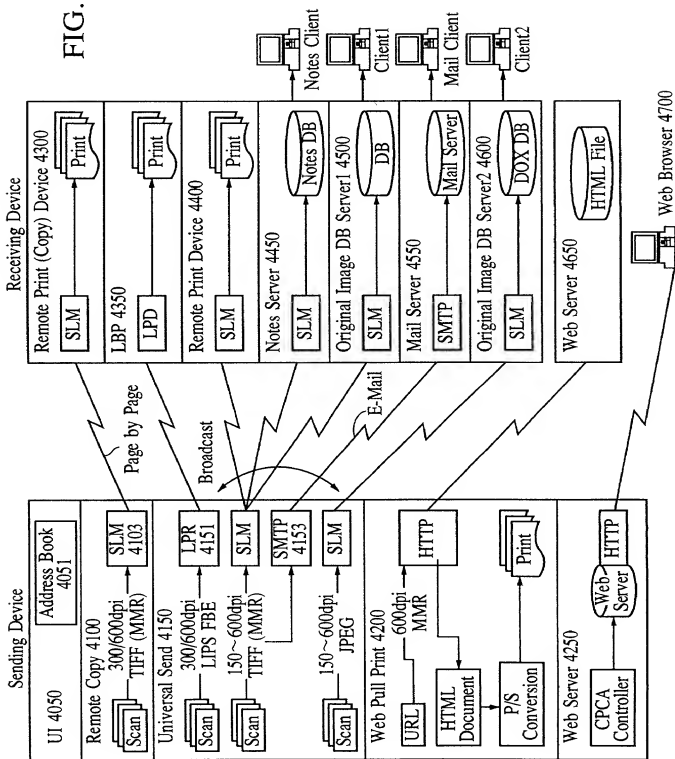


FIG. 14

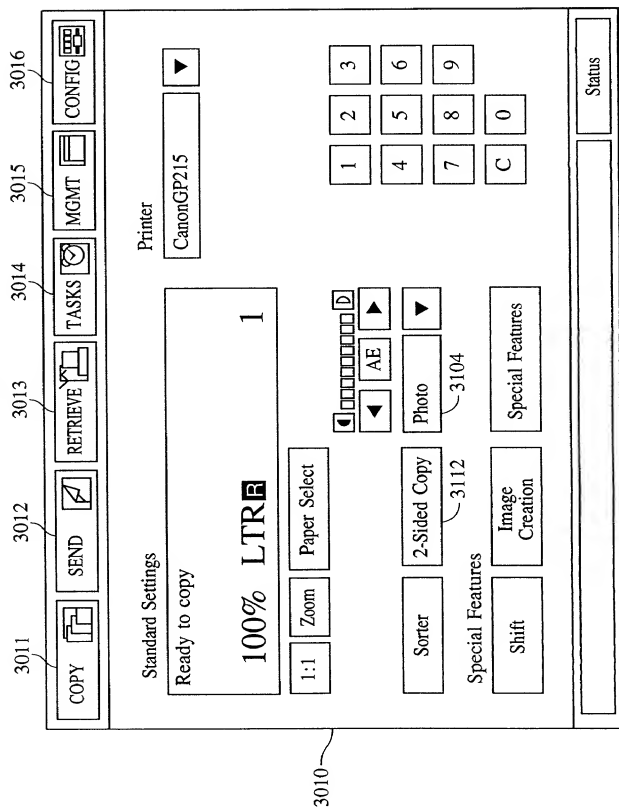


FIG. 15

The figure illustrates a graphical user interface (GUI) for a device, likely a mobile phone or PDA. The interface is organized into several sections:

- Top Menu Bar:** Contains icons and labels for 'COPY', 'SEND', 'RETRIEVE', 'TASKS', 'MGMT', and 'CONFIG'.
- Main Display Area:**
 - Header:** 'St ID'.
 - Input Fields:** Two fields labeled 'ID' (3021) and 'PassWord' (3022) are positioned above a numeric keypad.
 - Keypad (3023):** A 3x4 grid of buttons containing the numbers 1-9, 0, and a 'C' (clear) button.
 - Confirmation:** An 'OK' button is located below the keypad.
- Bottom Section:**
 - Navigation:** Buttons for 'Creation' and 'Operation' are visible.
 - Status Bar:** A 'Status' label is present in the bottom right corner.

Reference numerals 3020, 3021, 3022, 3023, and 3024 point to specific elements: 3020 points to the main display area, 3021 to the ID input field, 3022 to the Password input field, 3023 to the numeric keypad, and 3024 to the OK button.

FIG. 16

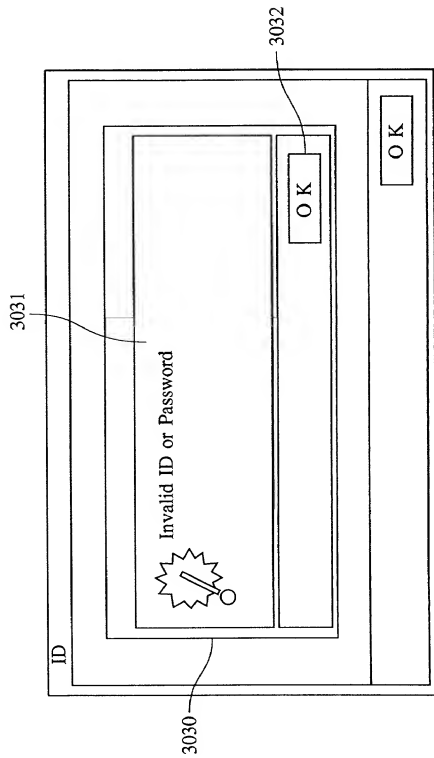


FIG. 17

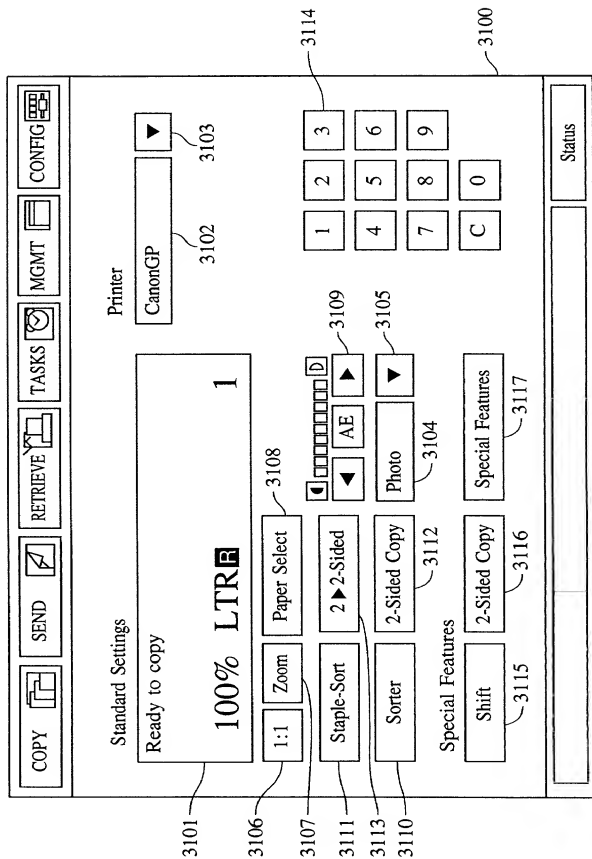


FIG. 20

Zoom

78%LGL ▶ LTR

73%11 × 17 ▶ LGL
11 × 15 ▶ LTR

64%11 × 17 ▶ LTR

50%

25%MIN

100 %

—

+

☐ Auto
 ☐ Entire Image

800%MAX

400%

200%

129%LTR ▶ 11 × 17

127%LGL ▶ 11 × 17

Zoom Program

XYZoom

Multi-pg Enlarge


Cancel

OK



3130



FIG. 21


Paper Select





☐ Auto Paper Select



1  LTR 


2  LGL 

3  LGL

4  LTR

5  SIMT

6  LGK 

 Stack Bypass

Stack Bypass Size

Cancel

OK

3140

FIG. 22

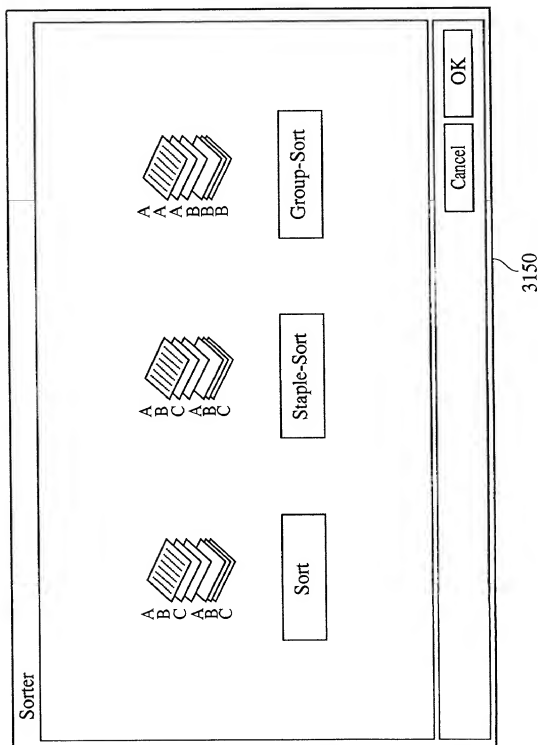


















FIG. 23

Two-Sided Copy

				1 ▶ 2-Sided
				2 ▶ 1-Sided
				2 ▶ 2-Sided
				Book ▶ 2-Sided

☐ Auto Counting

Odd Number

Even Number

Cancel OK

3160

FIG. 24

Destinations 3203 ~ Set: 6

- Carrot System TASKS/Canon Inc/JP
- Micky Rabbit/Jiji Team/Carrot Proj
- Micky Rabbit/Jiji Team/Carrot Proj
- Micky Rabbit/Jiji Team/Carrot Proj 3202
- minnyCabo.def.com
- +12(3)4567 9676
- CanonGP/Jiji Team/Carrot Project/C
- BEAM
- HOME/Jiji Team/Carrot Project/Cano
- I/micky/Mail

Subject 3205

Message 3206

File Name 3207

☐ Cover Page 3212

☐ Put into HD 3213

☐ Print Out 3214

Scan Setting 3215

LTRR 300dpi 100%

Buttons: COPY, RETRIEVE, SEND, TASKS, MGMT, CONFIG, AddBook, New, Edit, Delete

Status 3208

3209, 3210, 3211, 3200

FIG. 25

FIG. 25 is a screenshot of a user interface for a document management system, showing a "Destinations" screen for "Set: 6".

Top Navigation Bar: COPY, SEND, RETRIEVE, TASKS, MGMT, CONFIG.

Destinations Section:

- Set: 6**
- Touch the button on the bottom for sending** (with a magnifying glass icon)
- Select from Add Book** (with a magnifying glass icon and a right arrow)
- Input New Address** (with a right arrow)

Buttons: AddBook, New, Edit, Delete.

Form Fields:

- Subject:** [Text Field]
- Message:** [Text Field]
- File Name:** [Text Field]
- Cover Page:** ☐
- Put into HD:** ☐
- Print Out:** ☐

Scan Setting:

- LTRR
- 300dpi
- 100%

Status: [Text Field]

FIG. 26

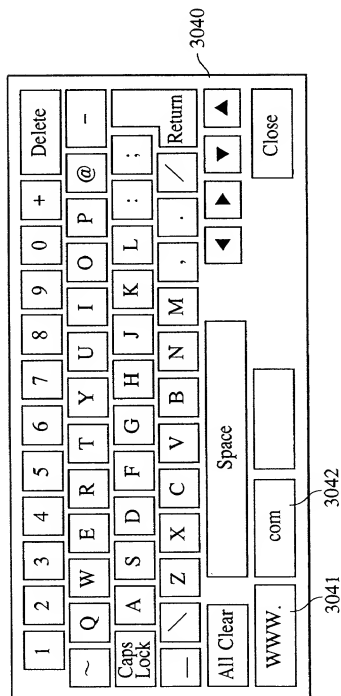


FIG. 27

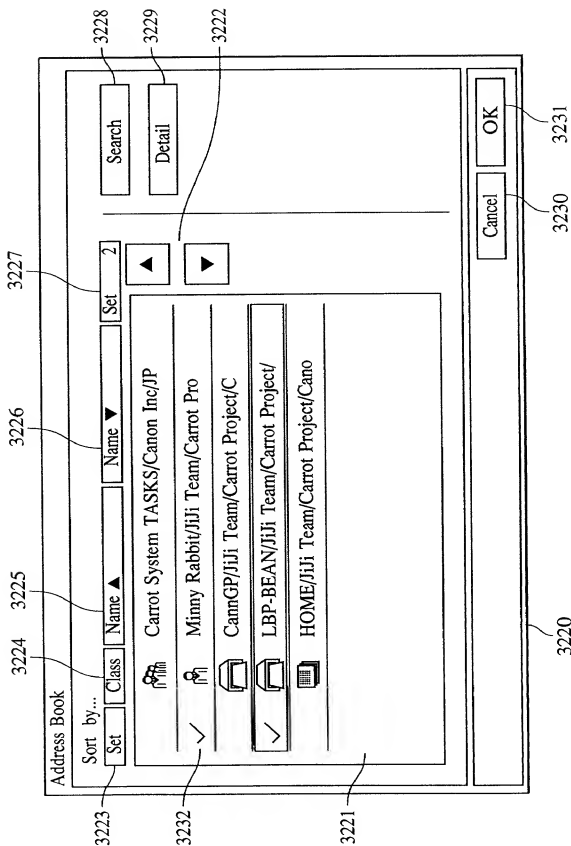


FIG. 28

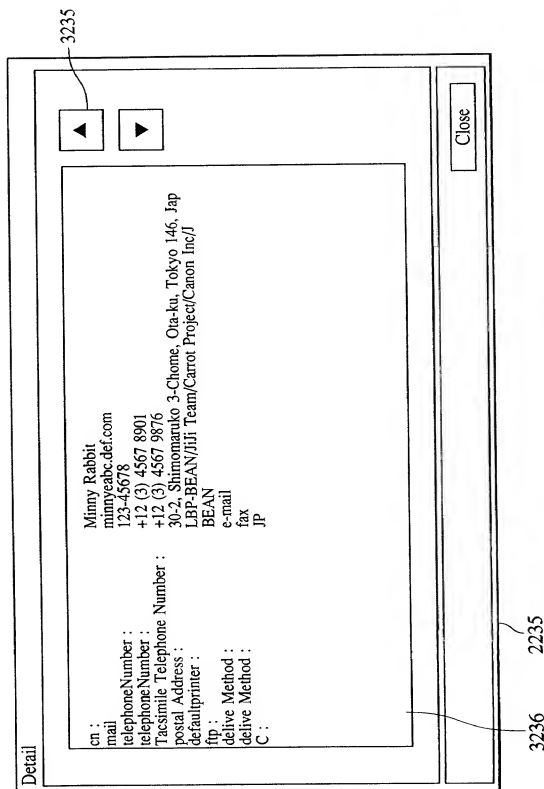


FIG. 29

The interface is a rectangular window with a title bar at the top. Inside, there is a search section on the left and a main content area on the right.

Search Section (Left):

- A label "Search" is at the top left of the section.
- Below it is a text input field containing "Everything".
- To the right of the input field is a dropdown menu showing "the".
- Below the dropdown is a text input field containing "Common Name".
- To the right of this field is a dropdown menu showing "in".
- Below the dropdown is a text input field containing "Local Address Book".
- To the right of this field is a dropdown menu showing "contains".
- Below the dropdown is a text input field containing "0".
- To the right of this field is a dropdown menu showing "Set".
- Below the dropdown is a text input field containing "Name".
- To the right of this field is a dropdown menu showing "Name".
- Below the dropdown is a text input field containing "Set".
- To the right of this field is a dropdown menu showing "0".
- Below the dropdown is a text input field containing "Detail".
- To the right of this field is a dropdown menu showing "Do Search".

Main Content Area (Right):

- A large rectangular area labeled "Search Result 0" is in the center.
- Below this area is a horizontal bar containing two buttons: "Cancel" and "OK".
- Below the buttons is a horizontal bar containing two buttons: "Cancel" and "OK".

Labels and Callouts:

- 3245 points to the "Everything" input field.
- 3246 points to the "the" dropdown menu.
- 3247 points to the "Common Name" input field.
- 3248 points to the "in" dropdown menu.
- 3249 points to the "Local Address Book" input field.
- 3250 points to the "contains" dropdown menu.
- 3251 points to the "0" input field.
- 3252 points to the "Set" dropdown menu.
- 3253 points to the "Name" input field.
- 3254 points to the "Name" dropdown menu.
- 3255 points to the "Set" dropdown menu.
- 3256 points to the "Detail" input field.
- 3257 points to the "Do Search" dropdown menu.
- 3241 points to the "Search Result 0" area.
- 3242 points to the "Cancel" button.
- 3243 points to the "OK" button.
- 3244 points to the "Cancel" button.
- 3240 points to the "OK" button.

FIG. 30

Search

Everything

Person

Printer

Data Base

Group

Everything

the

Common Name

▼

in

Local Address Book

▼

contains

▼

Do Search

Name ▼

Set

0

Detail

Search Result 0

◀

▶

Cancel

OK

FIG. 31

Search

Everything ▼ the ▼ Common Name ▼ contains ▼ Do Search

Common Name ▼ Address Book ▼

Set Class Name ▲ Set 0 Detail

Common Name
Address
Country
Owner
Location
Model

Search Result 0

Cancel OK

3261

FIG. 32

Search

Everything ▼ the Common Name ▼

Set Class Name ▲ Name ▼

in Local

contains ▼

is is n't contains doesn't contain

Do Search

Detail

▼

Search Result 0

Cancel OK

3262

FIG. 33

Search

Everything ▼ the Common Name ▼ contains ▼ Do Search

in

Set Class Name ▲

Local Address Book

Local Address Book

Search Result

LDAP server1

LDAP server2

LDAP server3

Detail

Search Result 0

Cancel OK

3263

FIG. 34

Search






Everything ▼ the Common Name ▼ contains ▼

in Local Address Book ▼

Do Search

Set Class Name ▲ Name ▼ Set S

Detail

✓		Carrot System TASKS/Canon Inc/JP	▲	▼
		Munny Rabbit/Jiji Team/Carrot Pro		
		CanonGP/Jiji Team/Carrot Project/C		
✓		LBP-BEAN/Jiji Team/Carrot Project		
✓		HOME/Jiji Team/Carrot Project/Cano		

Search Result 5

Cancel OK

3265

FIG. 35

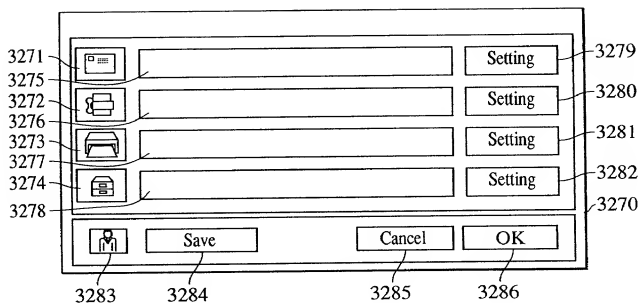


FIG. 36

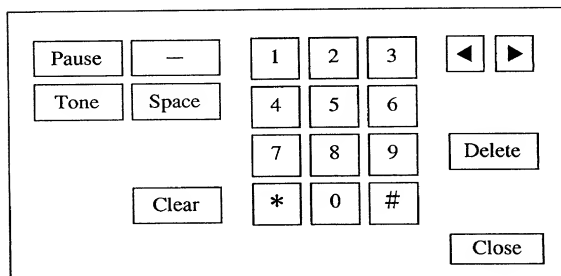


FIG. 37

minny @ abc. Clef. com Setting

+12 (3) 4567 9876 Setting

LBP-BEAN/JiJi Team/Carrot Project/C Setting

BEAN Setting

Save Cancel OK

3290

FIG. 38

■ Data Base Name HOME/JiJi Team/Carrot Proj

1 / micky / Mail

2 / minny / Mail

3 / / work

3311

3313

3310

3312

3314

Cancel OK

3315 3316

FIG. 39

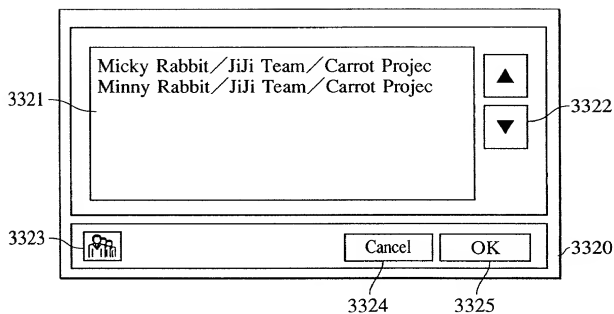
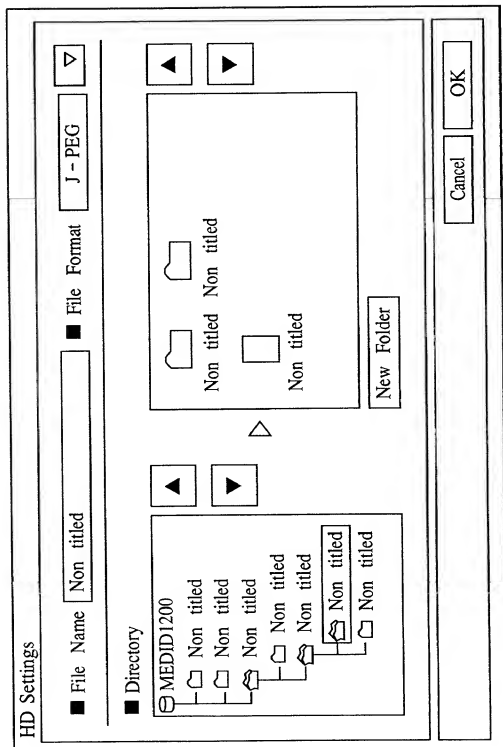


FIG. 40



3330

FIG. 41

Print Setting

3341

3342 3346 3344 3343 3345 3347

☐ Copies

☐ Paper Select

☐ Zoom

☐ Duplex

☐ Sorter

☐ Resolution

1

A3

100 %

non - sort

200 dpi

Margin

Shift

Overlay

N on 1

Image Creation

Cancel 3358 3359

OK 3357

3353 3354 3355 3356 3357

3340 3351 3352

FIG. 42

Print Setting

☐ Copies

☐ Paper Select

☐ Zoom

☐ Footer/Header

☐ Sorter

☐ Resolution

1

-

+

A4

A3

A4

A4R

A5

A5R

B4

▼

▲

Margin

Shift

Overlay

N on 1

Image Creation

Capability

Cancel

OK

3360

FIG. 43

Print Setting

☐ Copies

☐ Paper Select

☐ Zoom

☐ Footer/Header

☐ Sorter

☐ Resolution

☐ Margin

☐ Shift

☐ Overlay

☐ N on 1

☐ Image Creation

☐ Capability

☐ non - sort

☐ non - sort

☐ 200 dpi

☐ 1

☐ +

☐ -

☐ OK

☐ Cancel

3365

FIG. 44

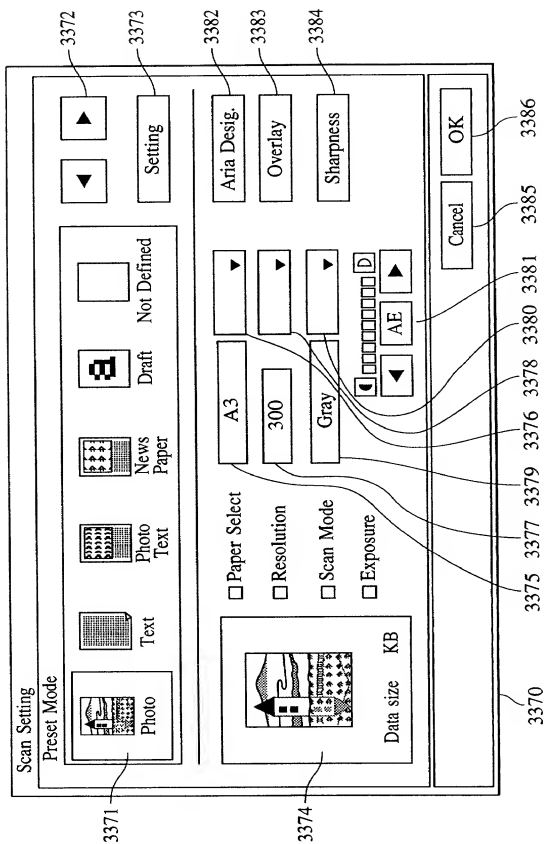


FIG. 45

Scan Setting

Preset Mode

☐ Photo
☐ Text
☐ News Paper
☐ Draft
☐ Not Defined

☐ Paper Select
☐ Resolution
☐ Scan Mode
☐ Exposure

☐ Aria Desig.
☐ Overlay
☐ Sharpness

☐ Data size KB

3390

FIG. 46

Scan Setting

Preset Mode

☐ Photo
☐ Text
☐ News Paper
☒ Draft
☐ Not Defined

☐ Paper Select
☐ Resolution
☐ Scan Mode
☐ Exposure

☐ Aria Desig.
☐ Overlay
☐ Sharpness







KB



3391

FIG. 47

Scan Setting


Preset Mode

 Photo
 Text
 Photo Text
 News Paper
 Draft
 Not Defined

Setting

☐ Paper Select
☐ Resolution
☐ Scan Mode
☐ Exposure



Data size KB

A3
 300
 Gray
 Gray
 Black & White

Aria Desig.
 Overlay
 Sharpness

Cancel
 OK

3392

FIG. 48

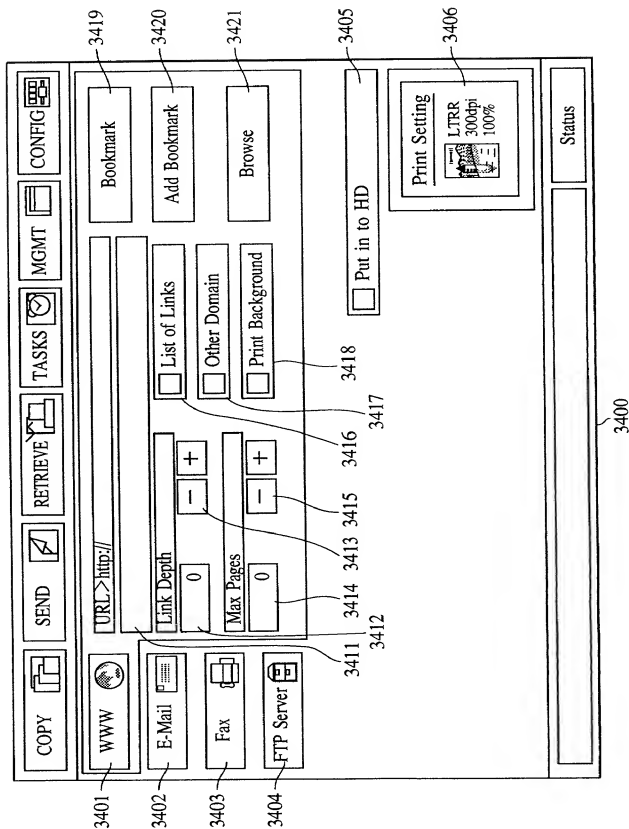


FIG. 49

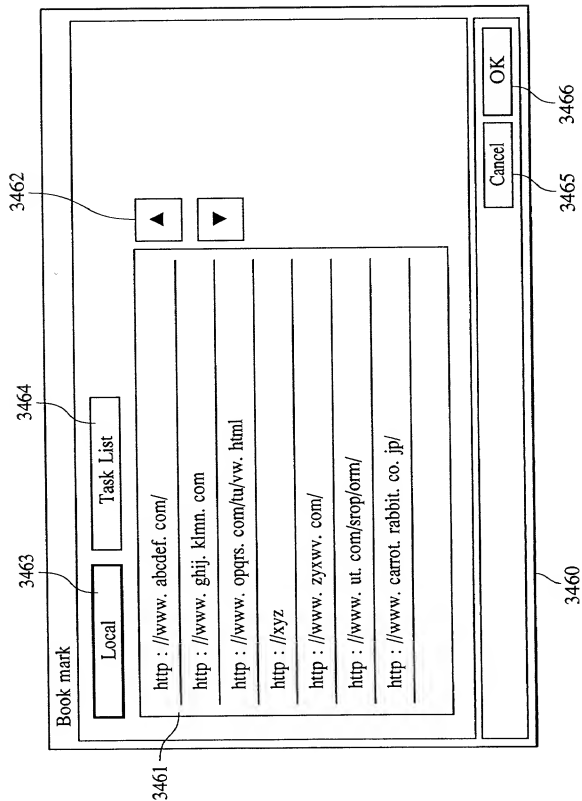













FIG. 50

COPY 	SEND 	RETRIEVE 	TASKS 	MGMT 	CONFIG 
---	--	--	---	--	--

 WWW	<input type="text" value="Server"/>
 E-Mail	<input type="text" value="Login Name"/>
 Fax	<input type="text" value="Password"/>
 FTP Server	<input type="checkbox"/> Delete From Server

☐ Put in to HD

Print Setting

 LTRR
 200dpi
 100%

Status







3430





FIG. 51

FIG. 51 is a screenshot of a web-based interface, likely for a fax machine or a similar communication device. The interface is organized into several sections:

- Top Navigation Bar:** Contains icons and labels for various functions: COPY, SEND, RETRIEVE, TASKS, MGMT, and CONFIG.
- Left Sidebar:** Contains links for WWW, E-Mail, Fax, and FTP Server.
- Main Content Area:**
 - Left Section:** A label "Fax Number" is positioned above a text input field containing the number "3441".
 - Right Section:** A checkbox labeled "Put in to HD" is present.
 - Bottom Section:** A "Print Setting" box displays "LTRR 200dpi 100%" and a small printer icon. To its right is a "Status" box.
- Large Empty Area:** A large, empty rectangular box is located in the center-right of the main content area, possibly for displaying a fax image or a large message.


FIG. 52

 COPY	 SEND	 RETRIEVE	 TASKS	 MGMT	 CONFIG
---	--	--	---	--	--

 WWW	
 E-Mail	
 Fax	
 FTP Server	

Server 3451	
Login Name	Password 3453
3452	
<input type="checkbox"/> Delete From Server 3454	


☐ Put in to HD

Print Setting

LTRR
200dpi
100%

<div>3450</div>		Status
------------------------------	--	--------

FIG. 53

Print Setting



☐ Copies

☐ Paper Select

☐ Zoom

☐ Footer/Header

1

-

+

A3

▼

100

%

-

+

☐ Duplex

non - sort

▼

200

dpi

▼

▲

Margin

Shift

Overlay

N on 1

Image Creation

Capability

Cancel

OK

3470

FIG. 54

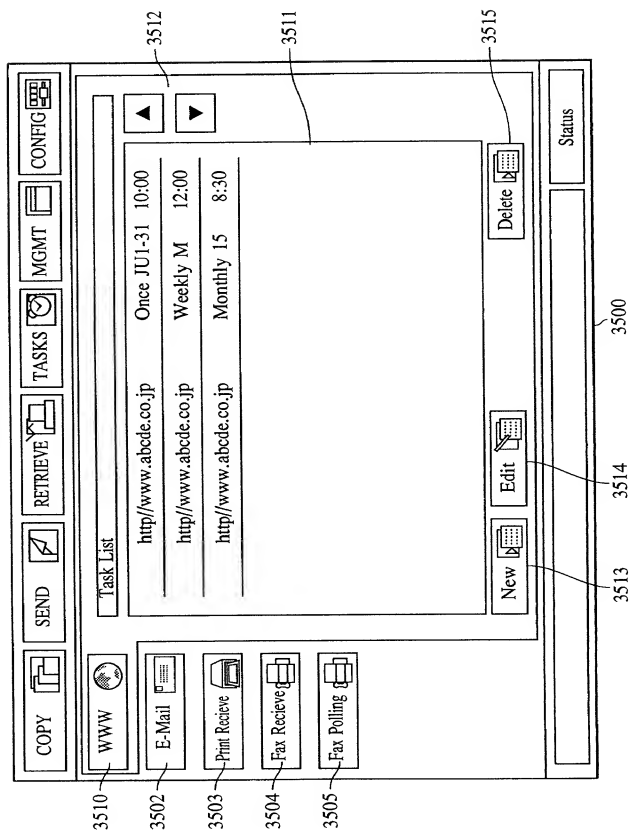


FIG. 55

3521 URL > http://

3522 Link Depth 0 + -

3523 Max Pages 0 + -

3524 ☐ List of Links

3525 ☐ Other Domain

3526 ☐ Print Background

3527 ☐ Put into HD

3528 ☐ Forward

3529 Check Time 10:00 Setting

3530 ☐ Print When Changed

3531 ☐ Print Setting

3532 LTR 200dpi 100%

3533 Bookmark

3534 Add Bookmark

3535 Browse

3536 Cancel

3537 OK

FIG. 56

Check Time

Time
10:00
+
-

Once
Weekly
Monthly

Month
Jan
Date
1

Cancel OK

3554 3551 3552 3553 3550 3555 3556 3557 3558

FIG. 57

Check Time

Time
10 : 00

− +

Once
Weekly
Monthly

☐ Sun ☐ Mon ☐ Tue
☒ Wed ☐ Thu ☐ Fri
☐ Sat

3561

3560

Cancel OK

FIG. 58

Check Time

Time
10 : 00 - +

Once
Weekly
Monthly

Date
1 - +

3571

3570

Cancel OK

FIG. 59

COPY

SEND

RETRIEVE

TASKS

MGMT

CONFIG

Job

Adress Book

Book mark

Document

Account

Function

All

Status

Waiting

Priority

Time

Title

User

▲

▼

■ Priority

▼

▲







Print List

Delete

Suspend

Status

FIG. 60

COPY 		SEND 		RETRIEVE 		TASKS 		MGMT 		CONFIG 	
---	--	--	--	--	--	---	--	--	--	--	--

<input type="checkbox"/> DHCP		<input type="checkbox"/> DNS Server	
Network E-Mail/WWW Directory User ID Maintenance Time		Host Name ppp01 Domain Name aaa. cccc. jp DNS Search Order 111. 000. 000. 1 222. 000. 000. 1	
IP Address 111. 222. 111. 000 IP Address 111. 111. 111. 0 Default Gateway 222. 222. 222. 222 Setting		Setting <input type="checkbox"/> Priority	
		<input type="button" value="▼"/> <input type="button" value="▲"/>	

<input type="text"/>		Status	
----------------------	--	--------	--

FIG. 61

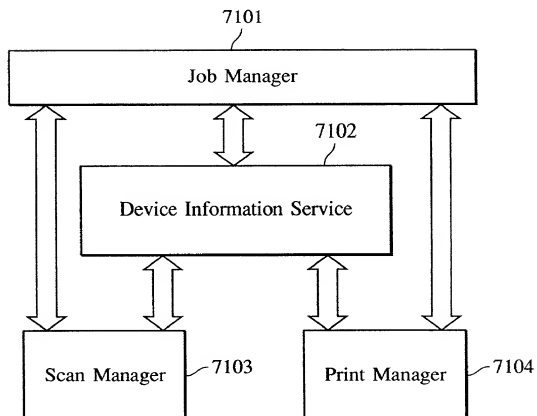
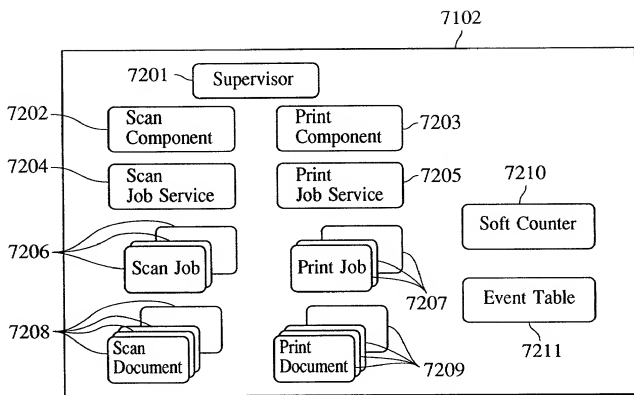


FIG. 62



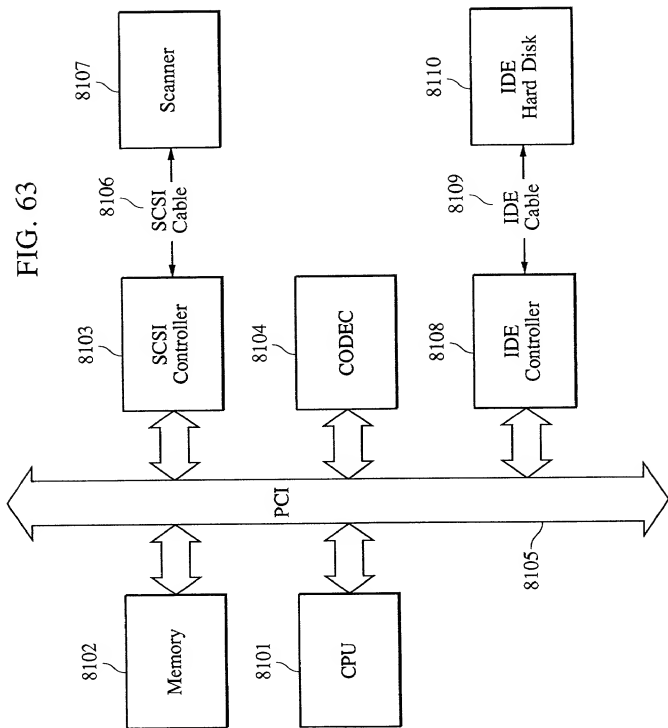


FIG. 64

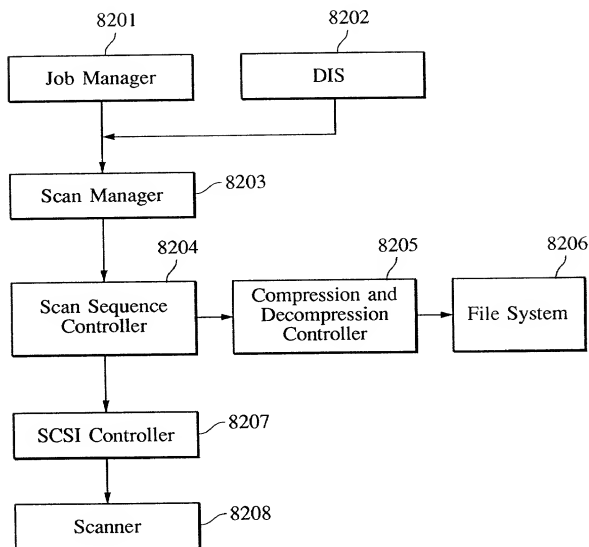


FIG. 65

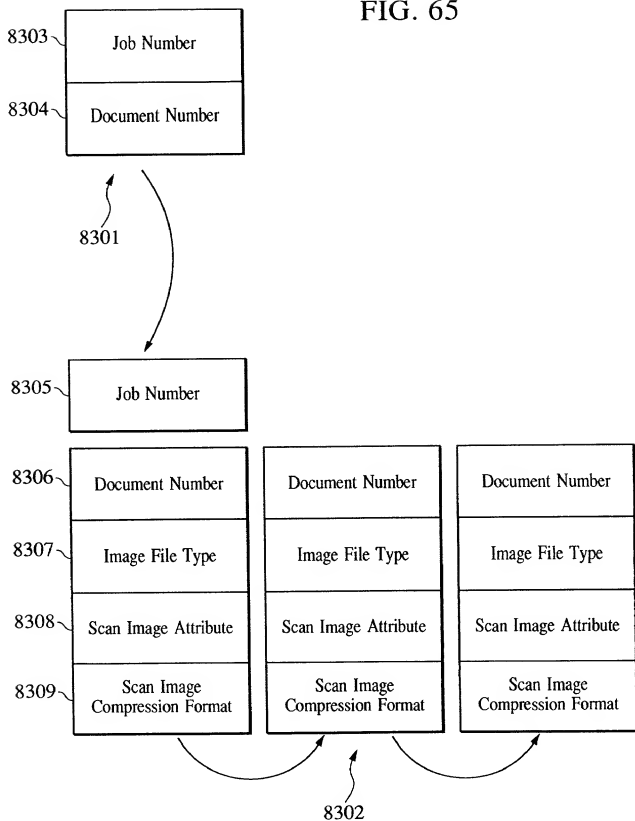
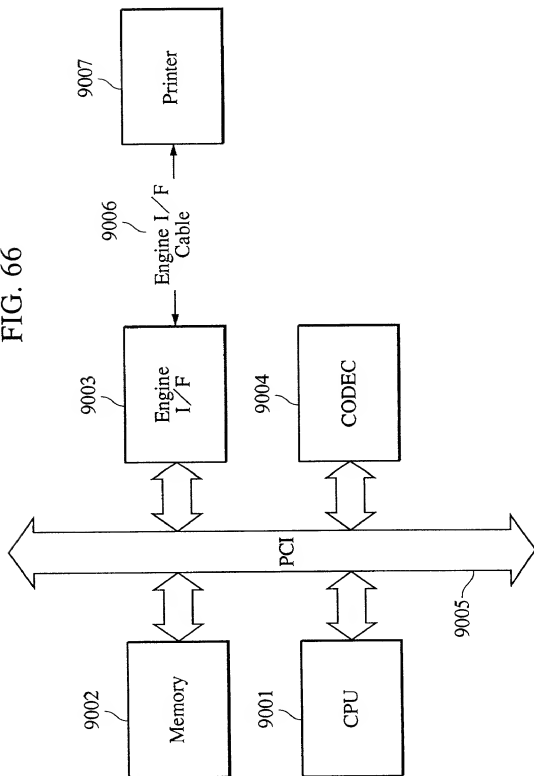
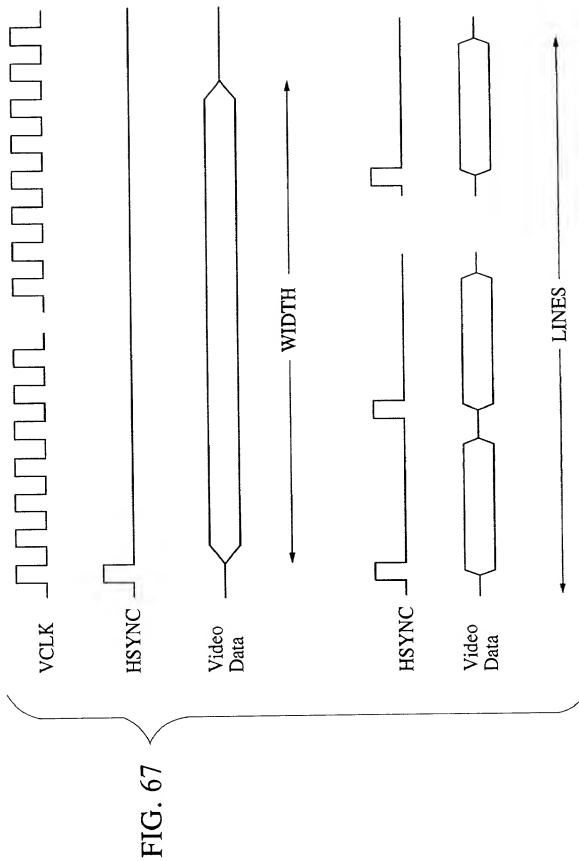


FIG. 66



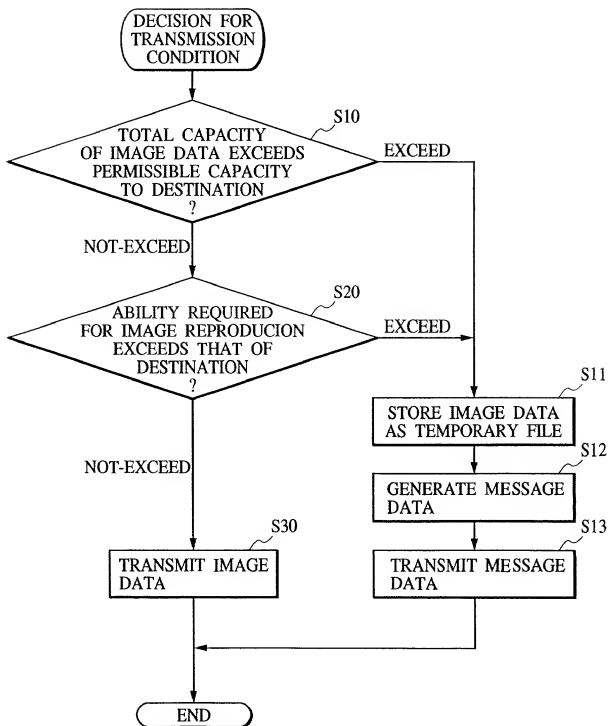


[illegible][illegible]

FIG. 69

BookNo
FEED__REQ
IMAGE__START
IMAGE__REQ
IMAGE__END
SHEET__OUT

FIG. 70



7100

FIG. 71

INFORMATION ROUTE	PERMISSIBLE DATA CAPACITY
PSTN (TELEPHONE LINE)	NOT DESIGNATED
ISDN (TELEPHONE LINE)	NOT DESIGNATED
LAN (10base)	1M BYTE
LAN (100base)	10M BYTES
INTERNET	500K BYTES

FIG. 72

7200

NAME OF DESTINATION	INFORMATION ROUTE	LIST OF ABILITY	
		REPRODUCTIVITY	PRODUCTIVITY
RESEARCH BLDG. 3RD FL. FAX	PSTN	B/W BINARY	A4
RESEARCH BLDG. 3RD FL. PC	LAN (10base)	-	-
RESEARCH BLDG. 3RD FL. WS	LAN (100base)	-	-
KOKURA INSTITUTE WS	INTERNET	-	-
KOKURA INSTITUTE WS	INTERNET	FULL COLOR	A3

FIG. 73

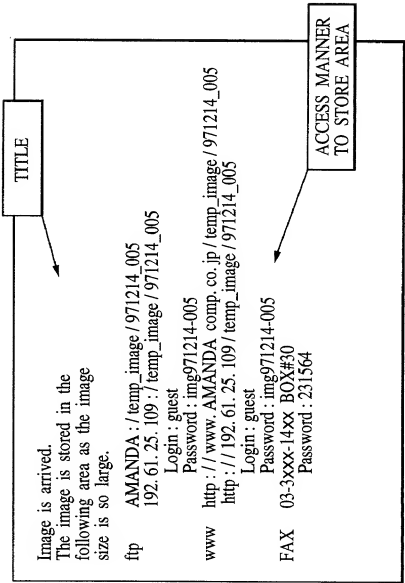


FIG. 74

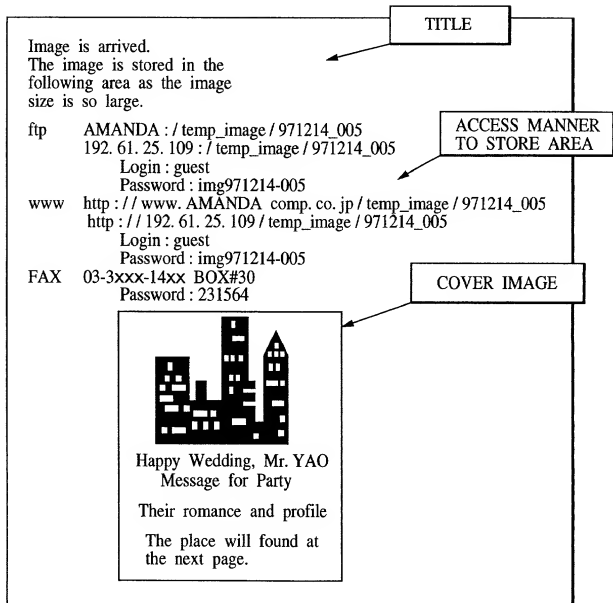
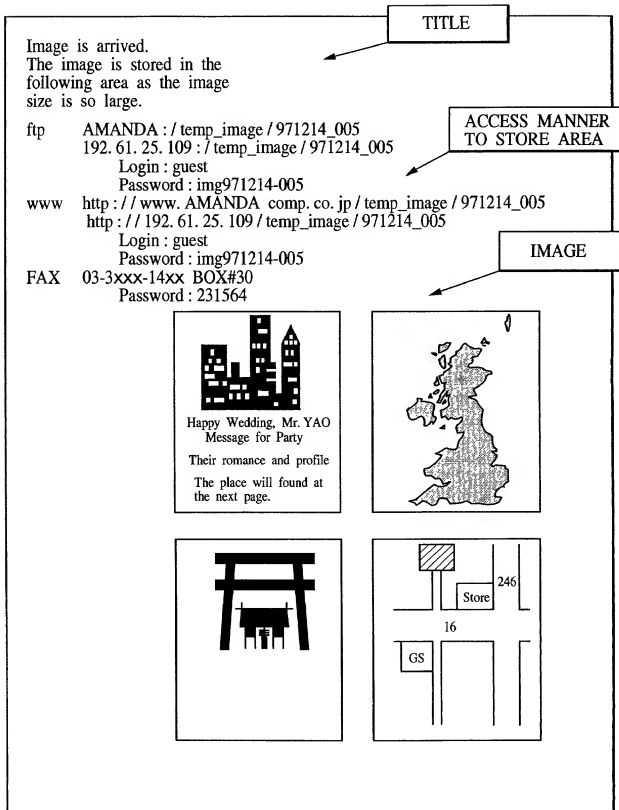


FIG. 75



6-6 1434 1-2

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled IMAGE DATA TRANSFER METHOD

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
JAPAN	11-076755	19 March 1999	Yes

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 65514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor HIROYOSHI YOSHIDA
Inventor's signature *Hiroyoshi Yoshida*
Date March 9, 2000 Citizen/Subject of Japan
Residence 1-1-203, Zengyo 1-chome, Fujisawa-shi,
Kanagawa-ken, Japan
Post Office Address c/o Canon Kabushiki Kaisha
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any _____
Second Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____